US 20160129361A1

(19) **United States**

(12) **Patent Application Publication**

**Howard**

(10) **Pub. No.: US 2016/0129361 A1**

(43) **Pub. Date: May 12, 2016**

(54) **SYSTEMS AND METHODS FOR ENHANCED BUILDING BLOCK APPLICATIONS**

(71) Applicant: **T. Dashon Howard**, Plymouth Meeting, PA (US)

(72) Inventor: **T. Dashon Howard**, Plymouth Meeting, PA (US)

(21) Appl. No.: **14/539,829**

(22) Filed: **Nov. 12, 2014**

**Publication Classification**

(51) **Int. Cl.**
*A63H 33/04* (2006.01)

(52) **U.S. Cl.**
CPC ..... ***A63H 33/046*** (2013.01)

(57) **ABSTRACT**

A curvilinear tetrahedral enhanced building block may be formed. The block may include sigmoid or reverse sigmoid curve edges, and may include curved vertices. The shape various planes or vertices of the block may be selected or adjusted to exert a force against a surrounding viscous medium. The block may include a conductive element configured to generate an electrostatic field, and may include a magnetic element configured to generate a magnetic field. The block may be configured to conduct electricity to a surrounding dielectric fluid, and the block's generation of a magnetic field may induce magnetohydrodynamic motion within the dielectric fluid.

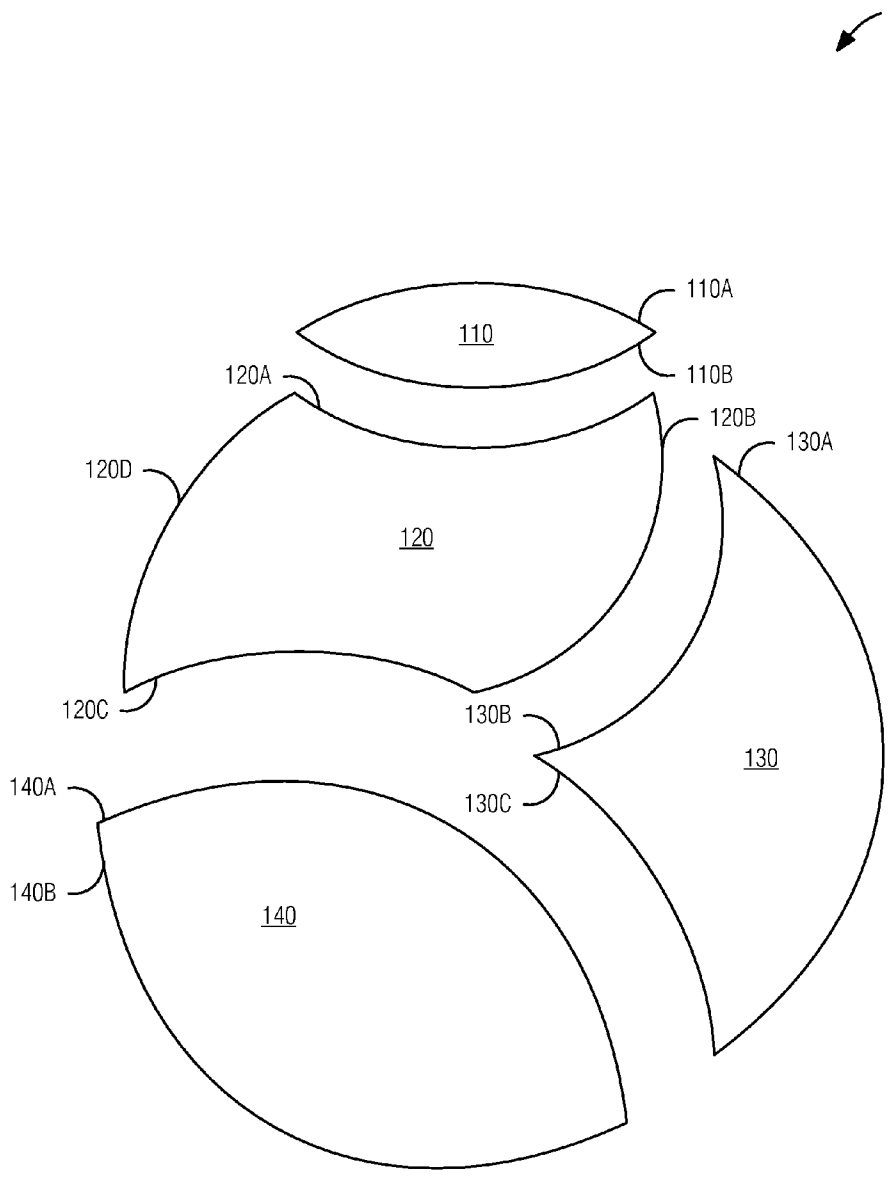

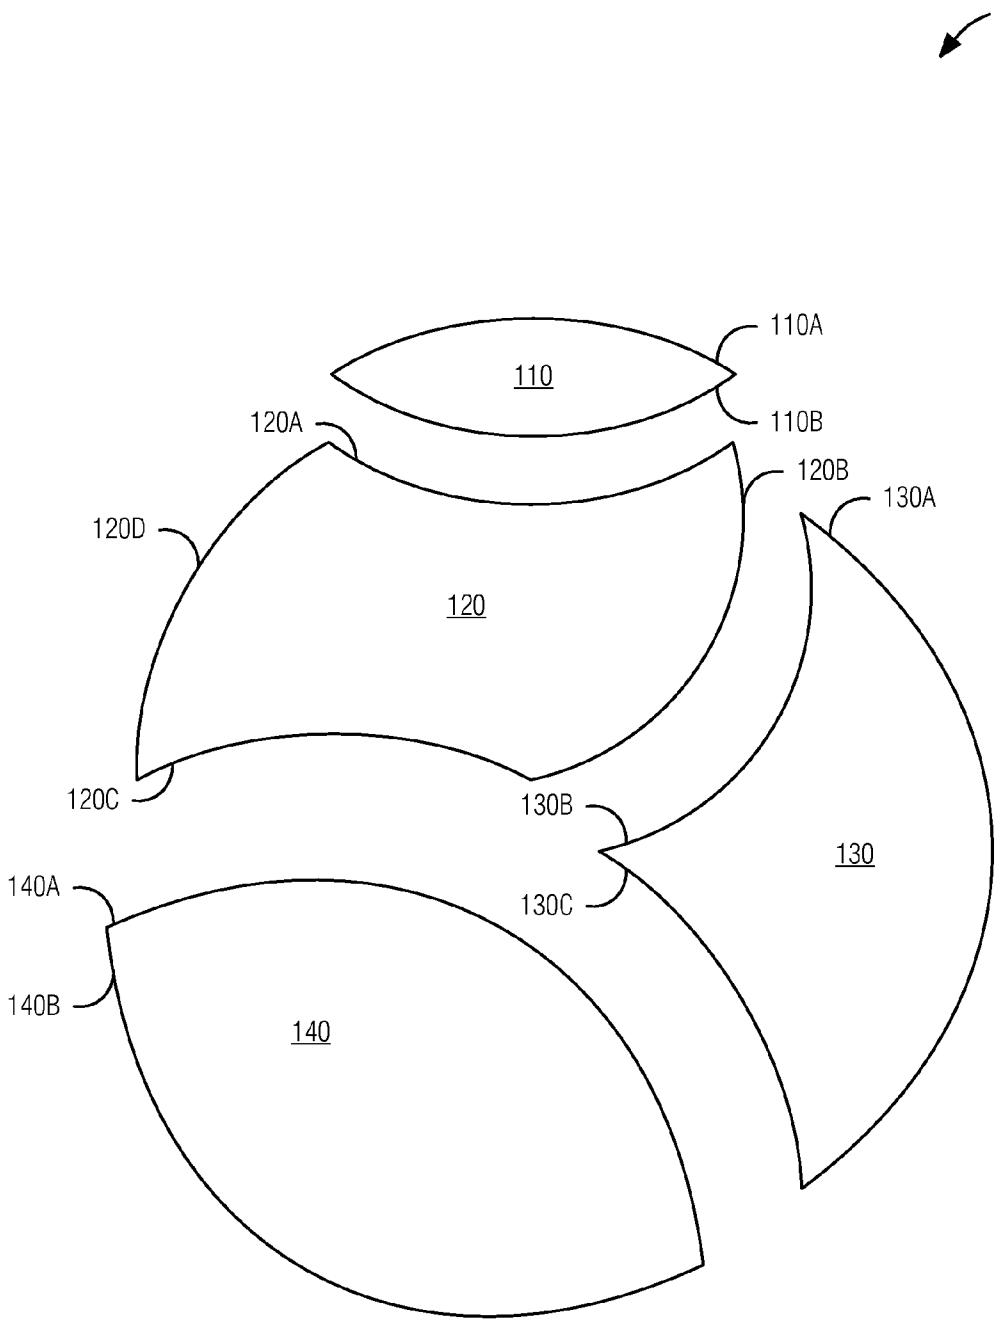
100
110A
110
110B
120A
120B
130A
120D
120
120C
130B
130
130C
140A
140B
140

FIG. 1

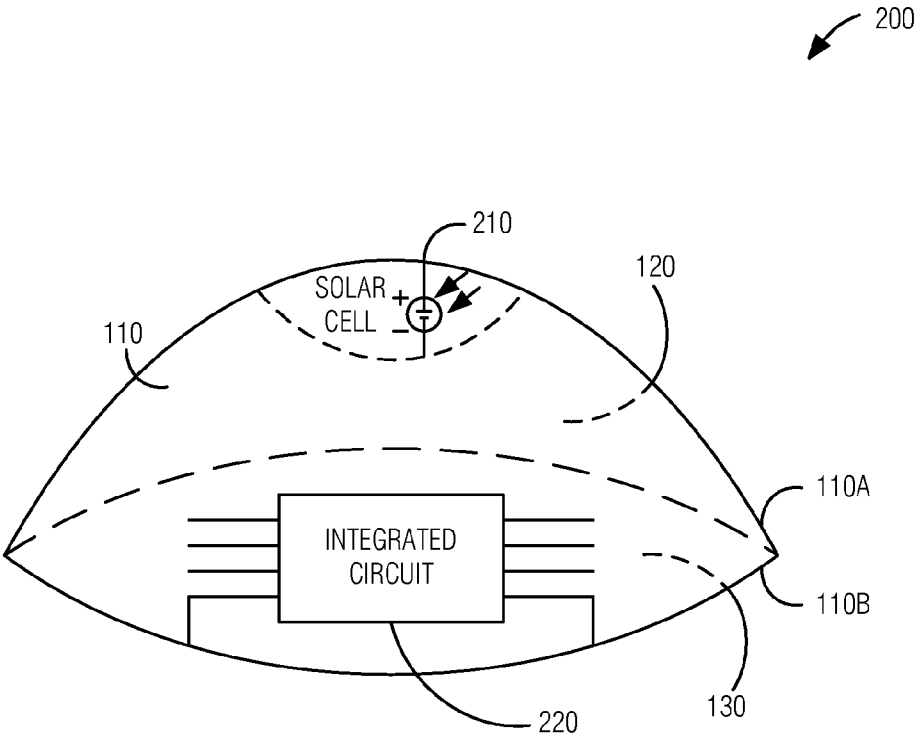
200
210
120
SOLAR CELL
110
110A
INTEGRATED CIRCUIT
110B
220
130

FIG. 2A

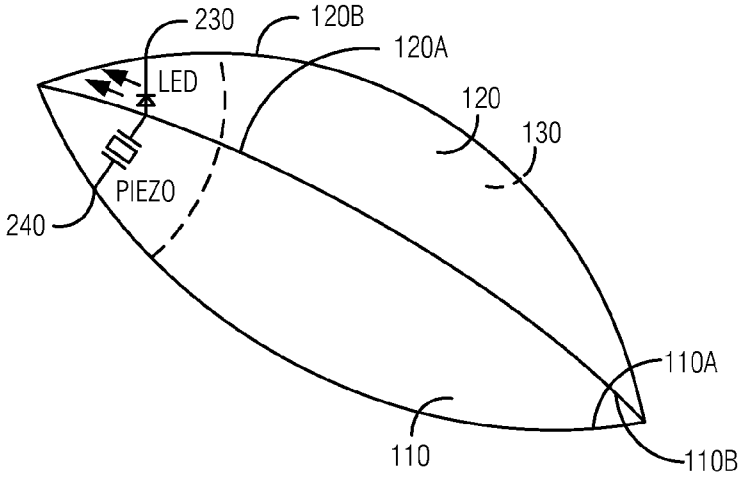
230
120B
120A
LED
120
130
PIEZO
240
110A
110
110B

FIG. 2B

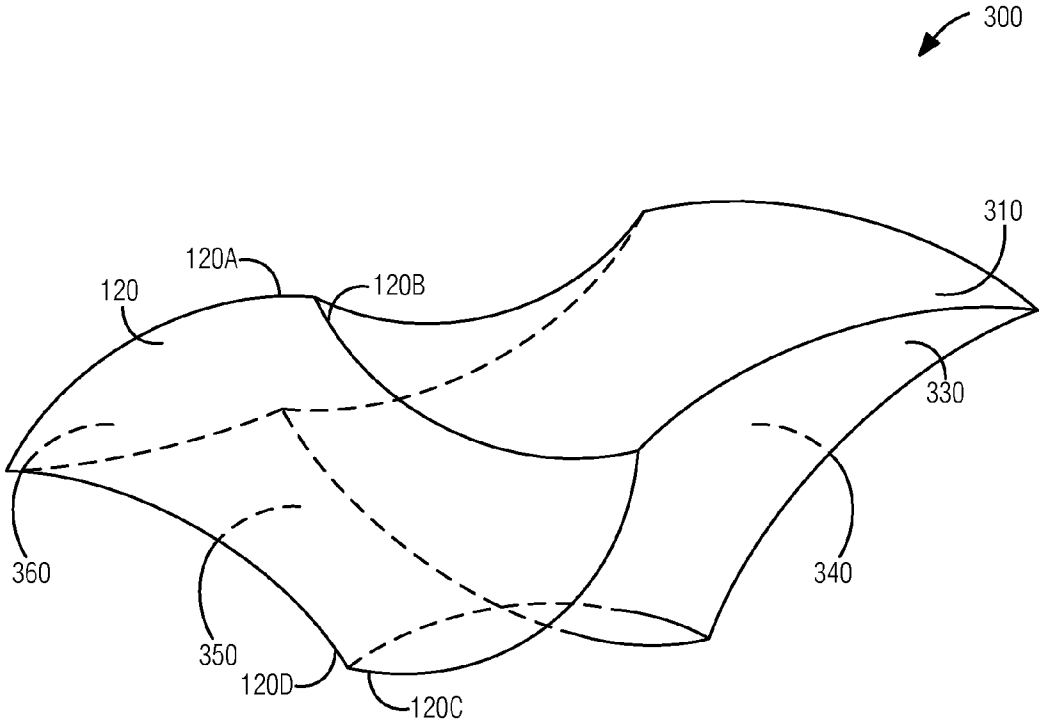
300
310
120A
120
120B
330
360
340
350
120D
120C

FIG. 3A

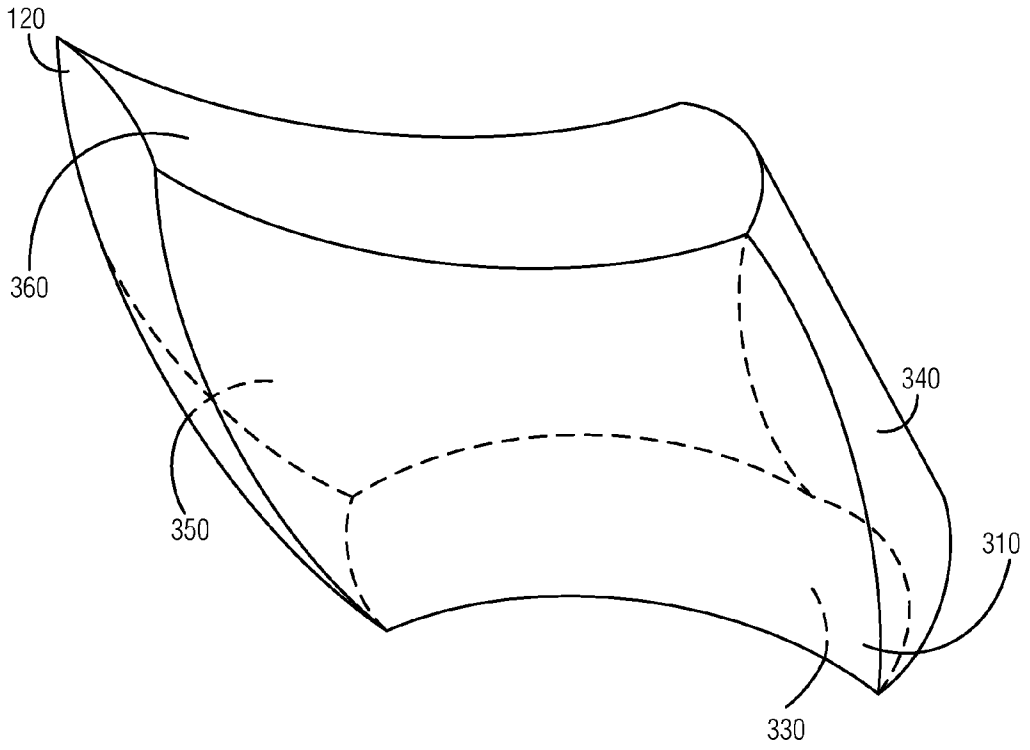
120
360
340
350
310
330

FIG. 3B

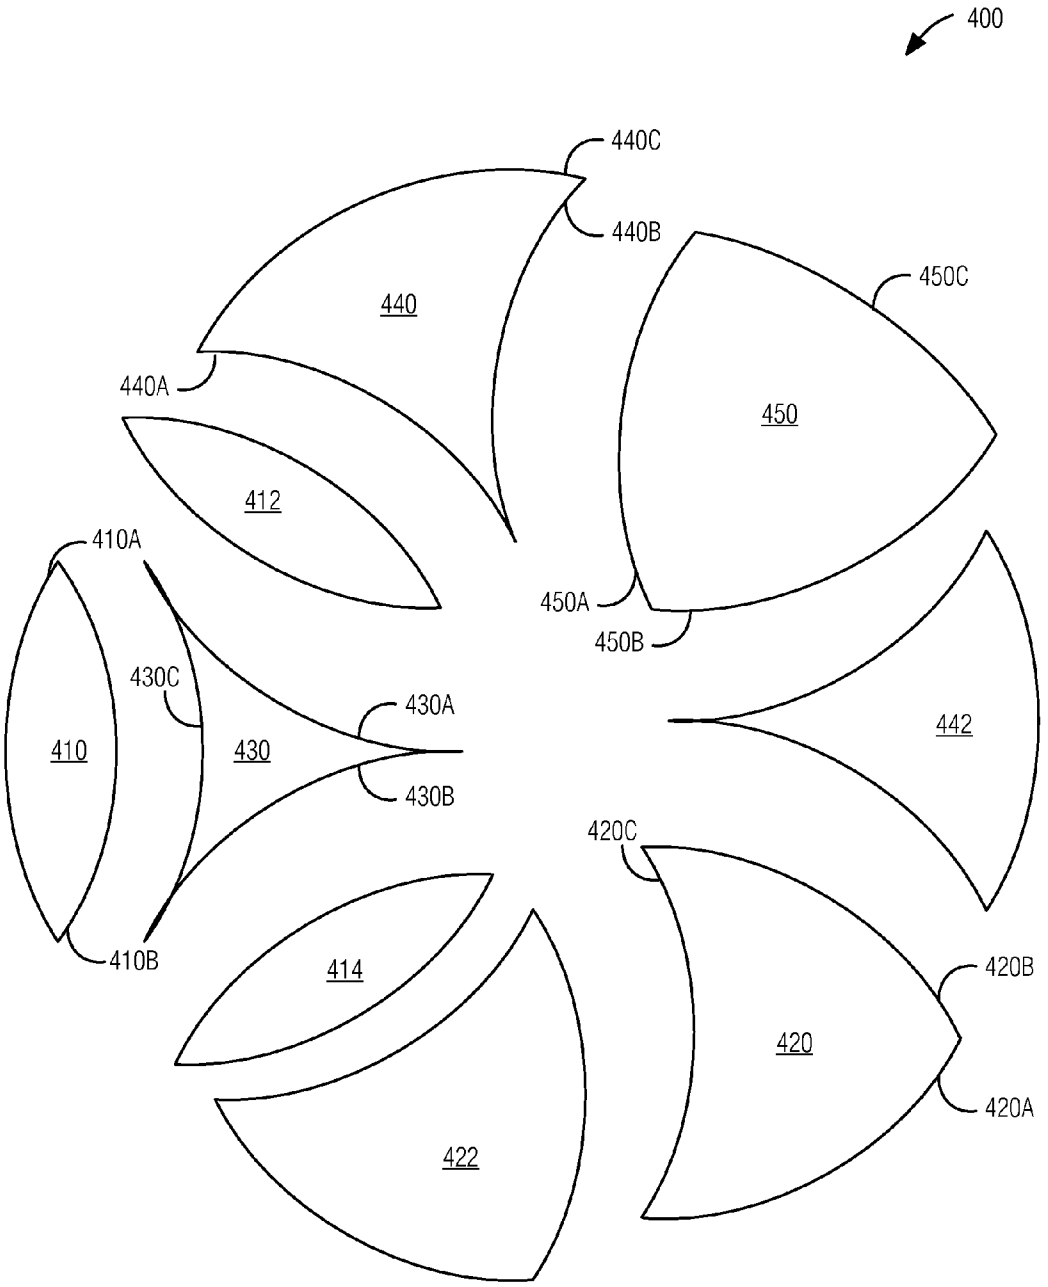
400
440C
440B
440
450C
440A
450
412
410A
450A
450B
430C
430A
442
410
430
430B
420C
414
420B
420
420A
422
410B

FIG. 4

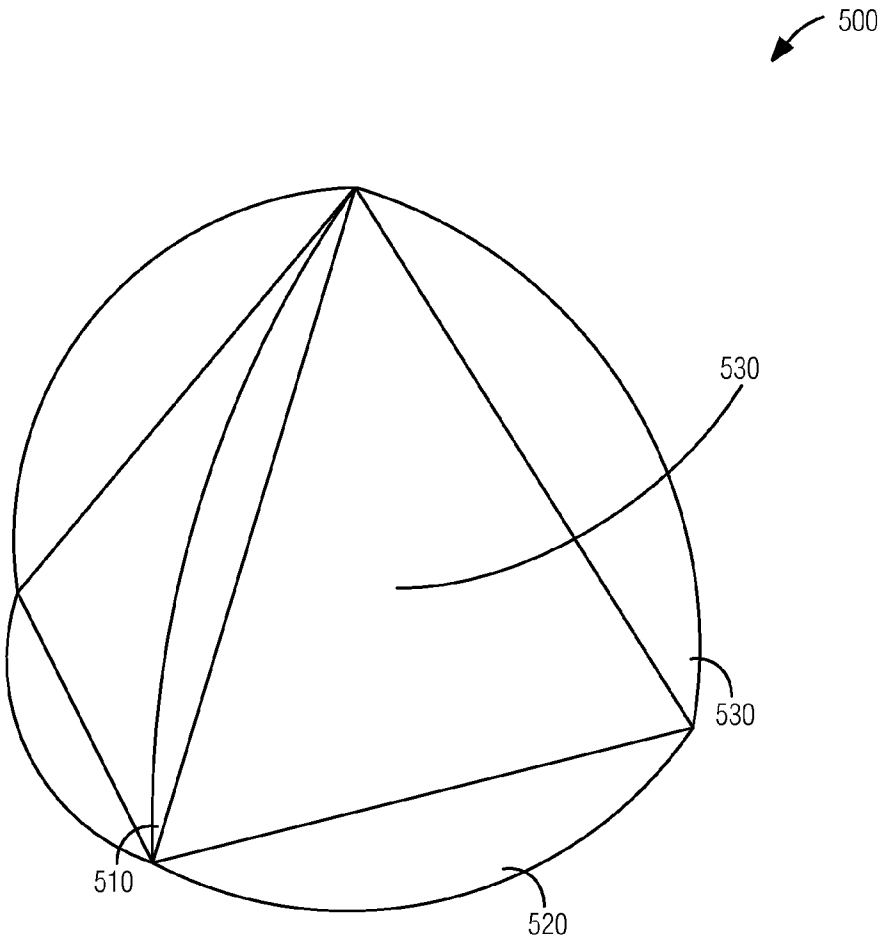


FIG. 5

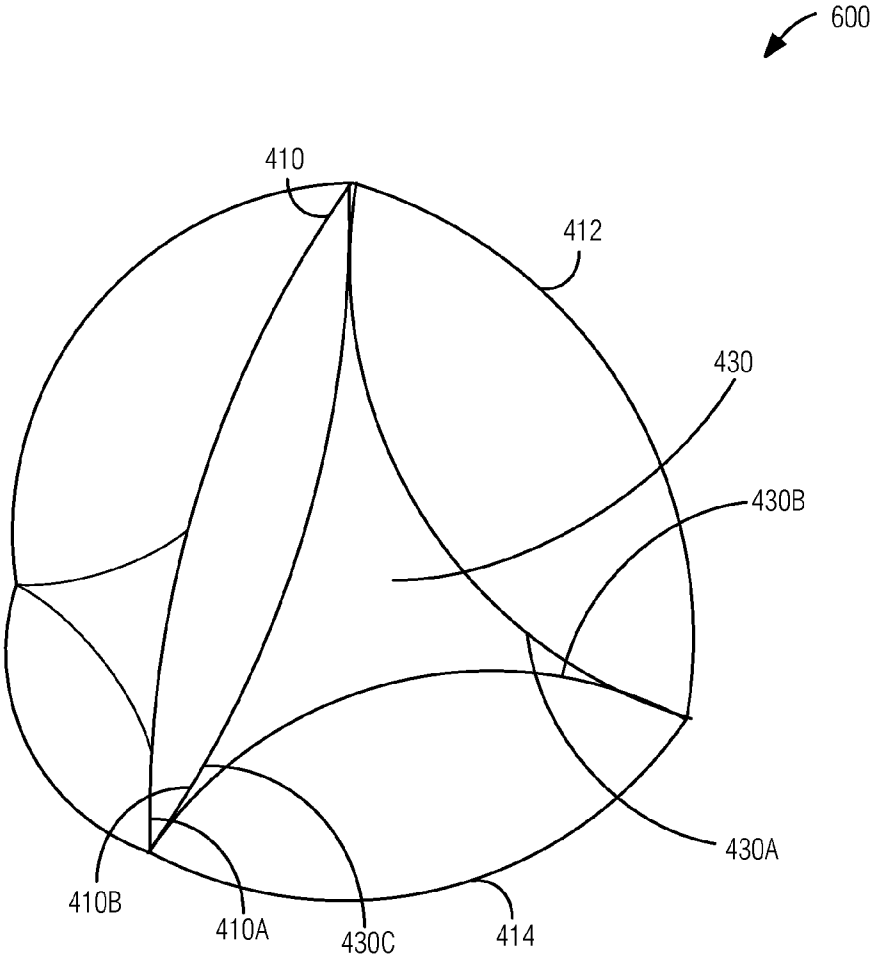


FIG. 6

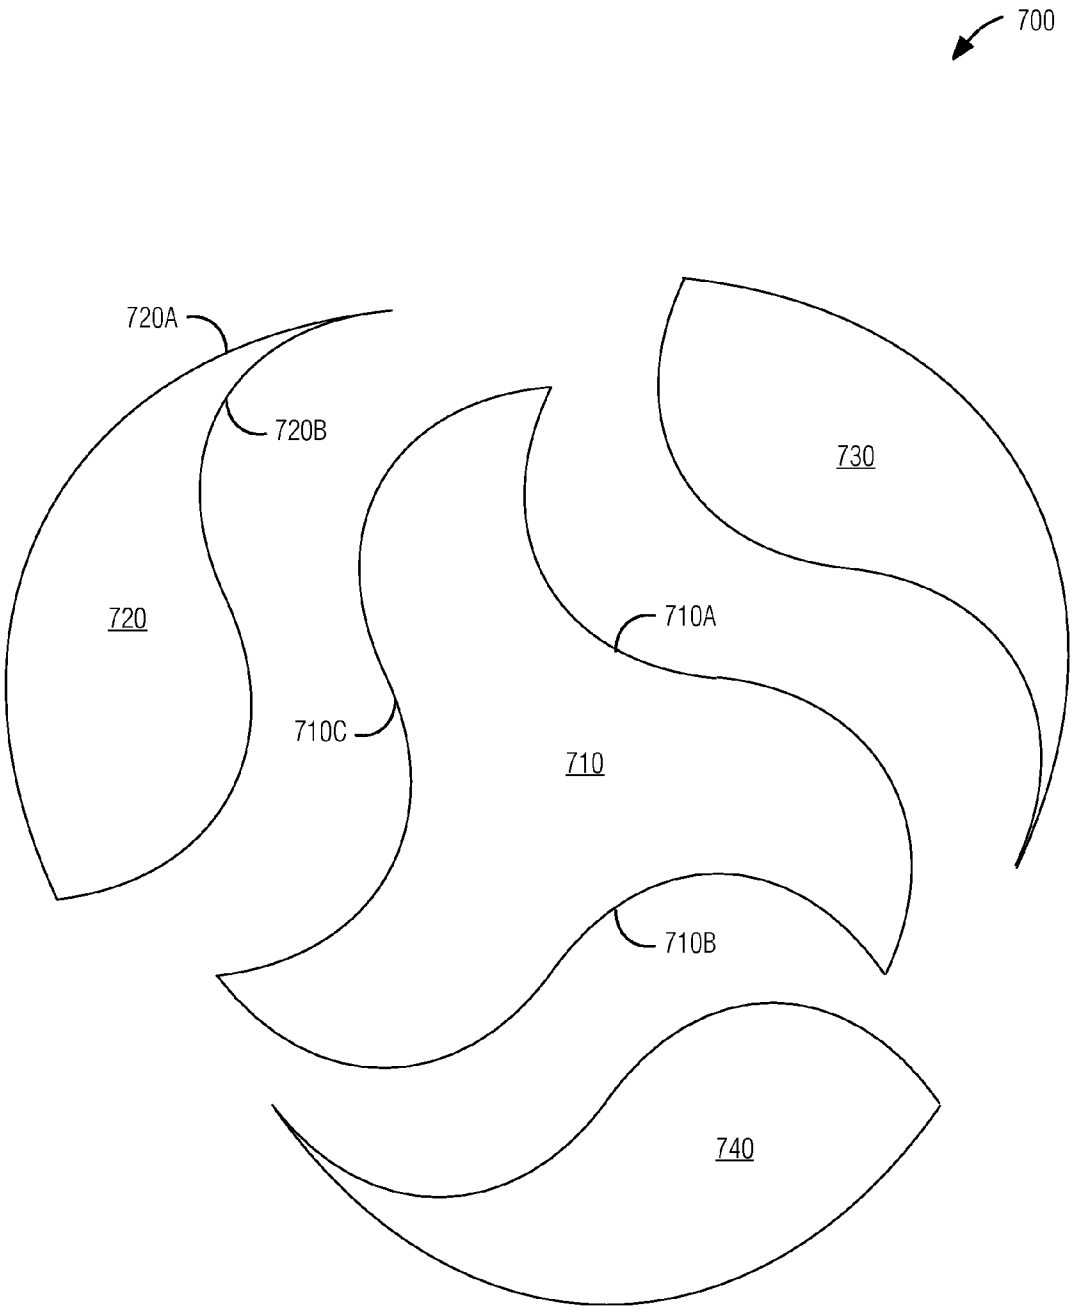


FIG. 7

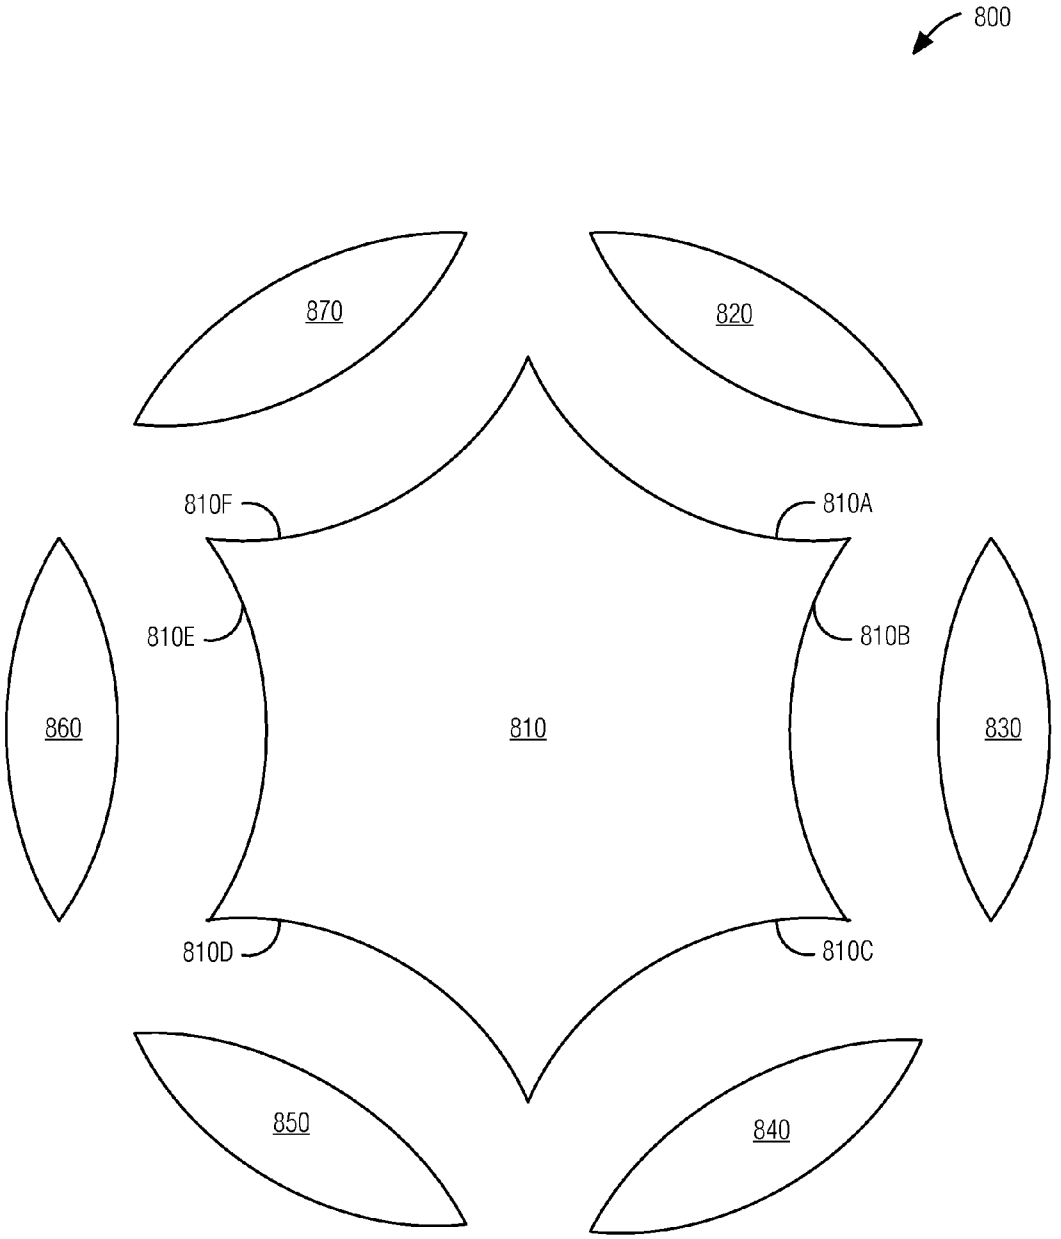


FIG. 8

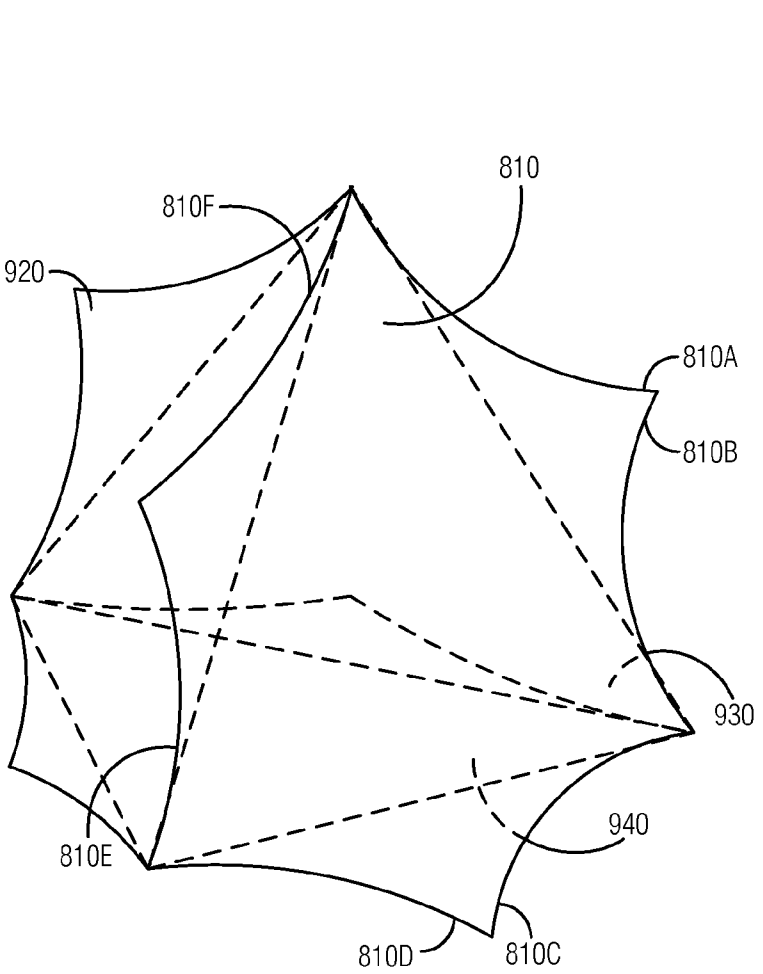


FIG. 9

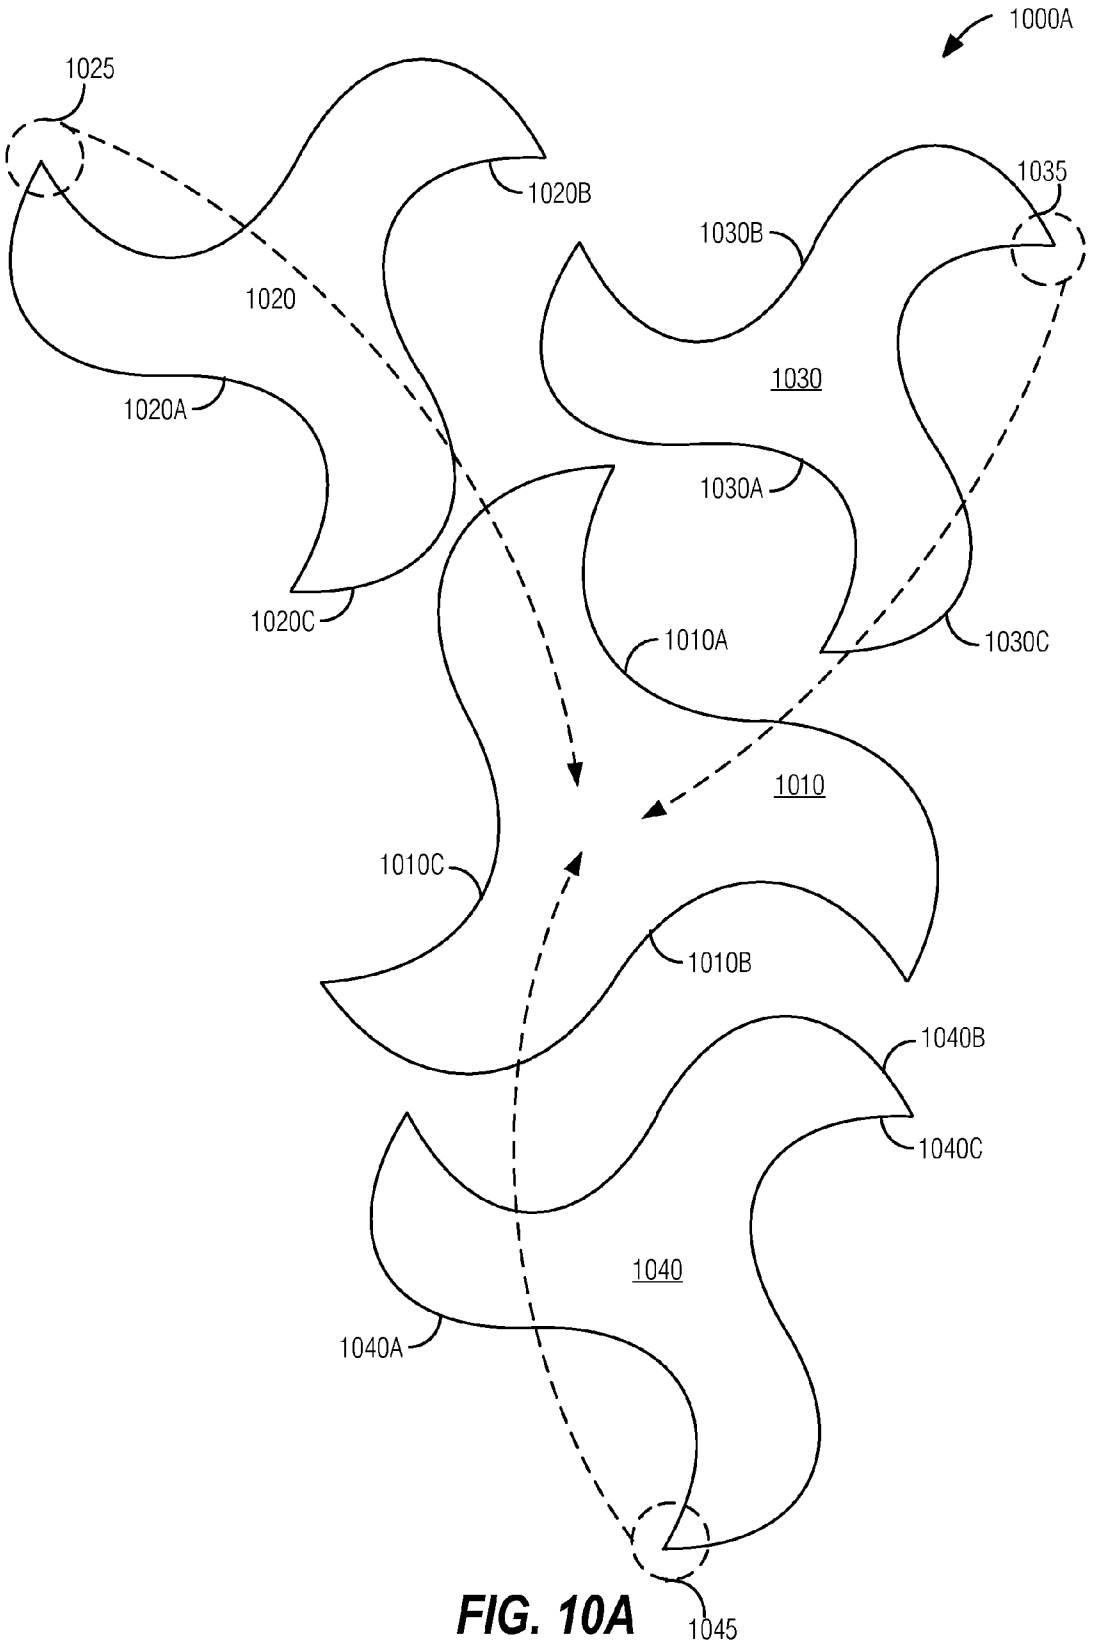
1000A
1025
1020B
1035
1030B
1020
1030
1020A
1030A
1020C
1010A
1030C
1010
1010C
1010B
1040B
1040C
1040
1040A
1045

FIG. 10A

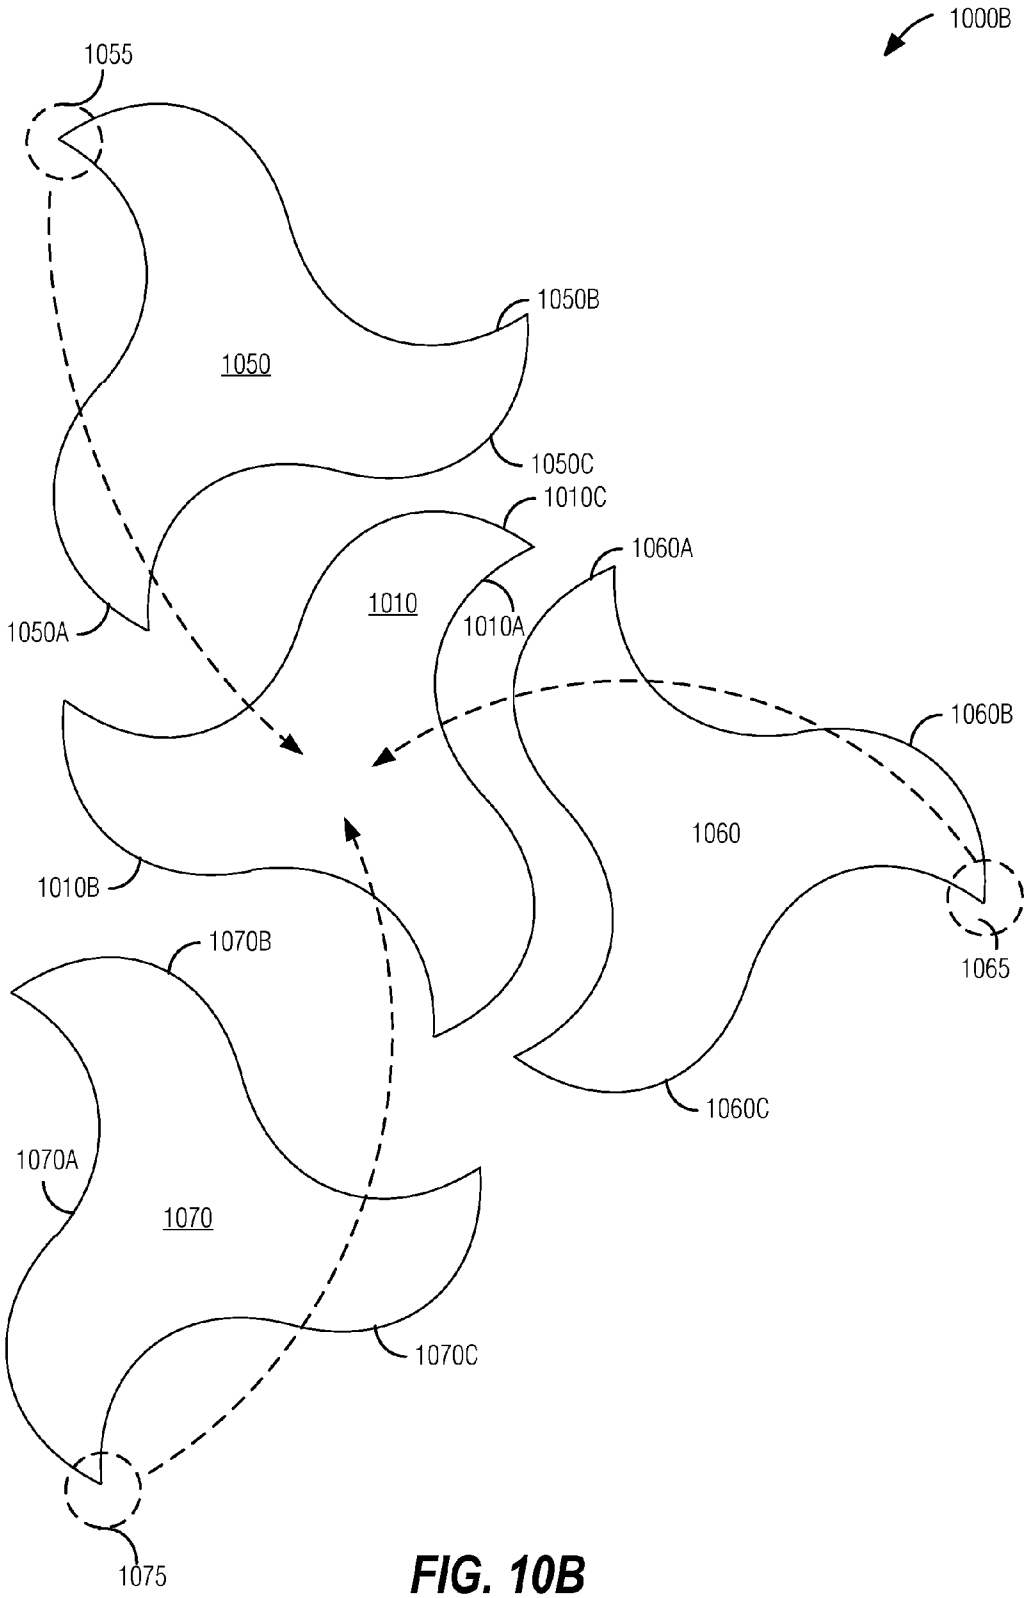
1000B
1055
1050B
1050
1050C
1010C
1060A
1050A
1010
1010A
1060B
1060
1010B
1065
1070B
1060C
1070A
1070
1070C
1075

FIG. 10B

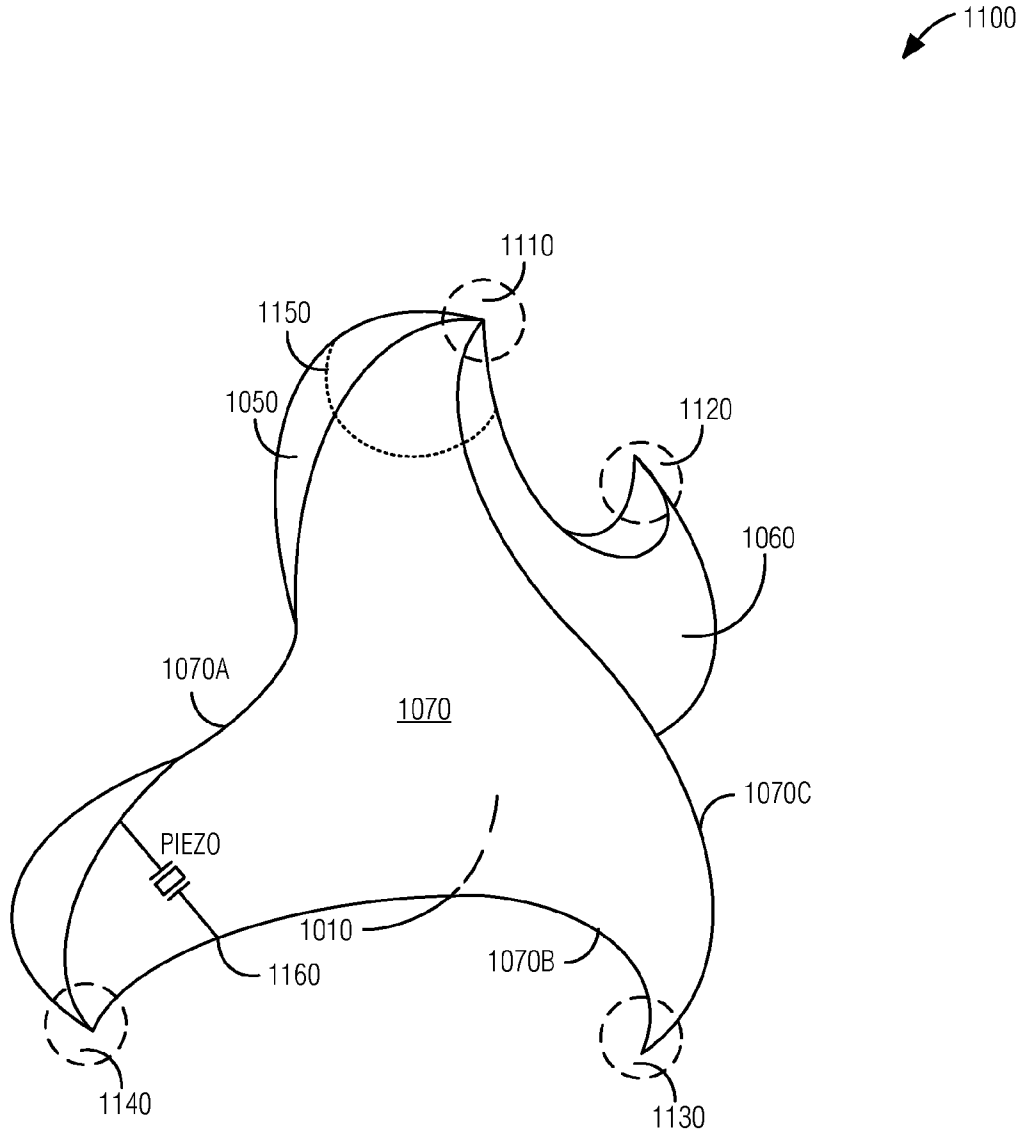
1100
1110
1150
1050
1120
1060
1070A
1070
1070C
PIEZO
1010
1160
1070B
1140
1130

FIG. 11

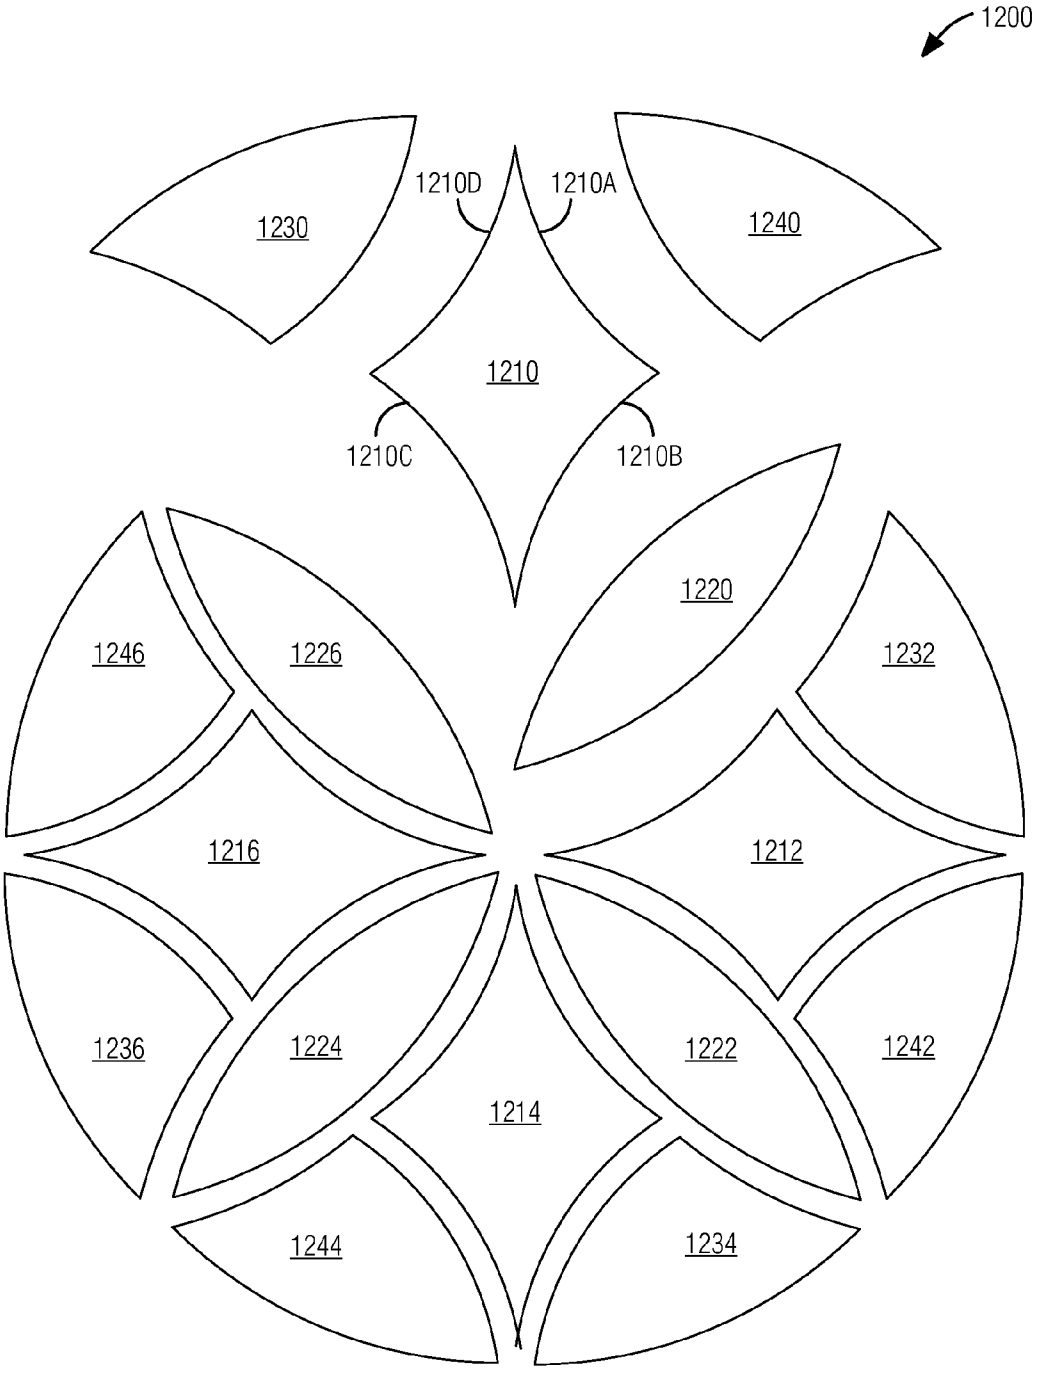
1200
1210D
1210A
1230
1240
1210
1210C
1210B
1220
1246
1226
1232
1216
1212
1236
1224
1222
1242
1214
1244
1234

FIG. 12

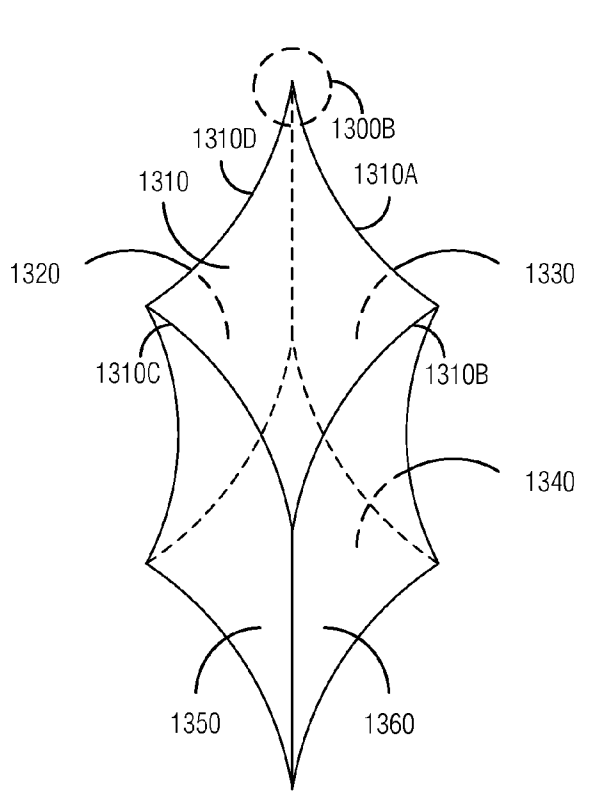


FIG. 13A

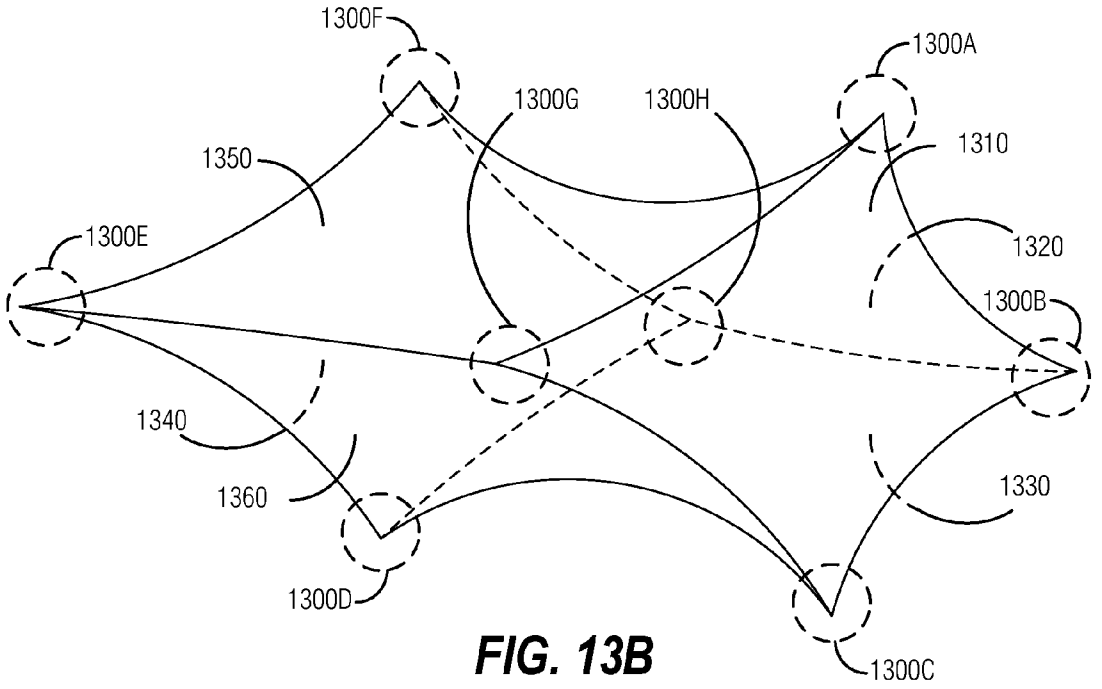


FIG. 13B

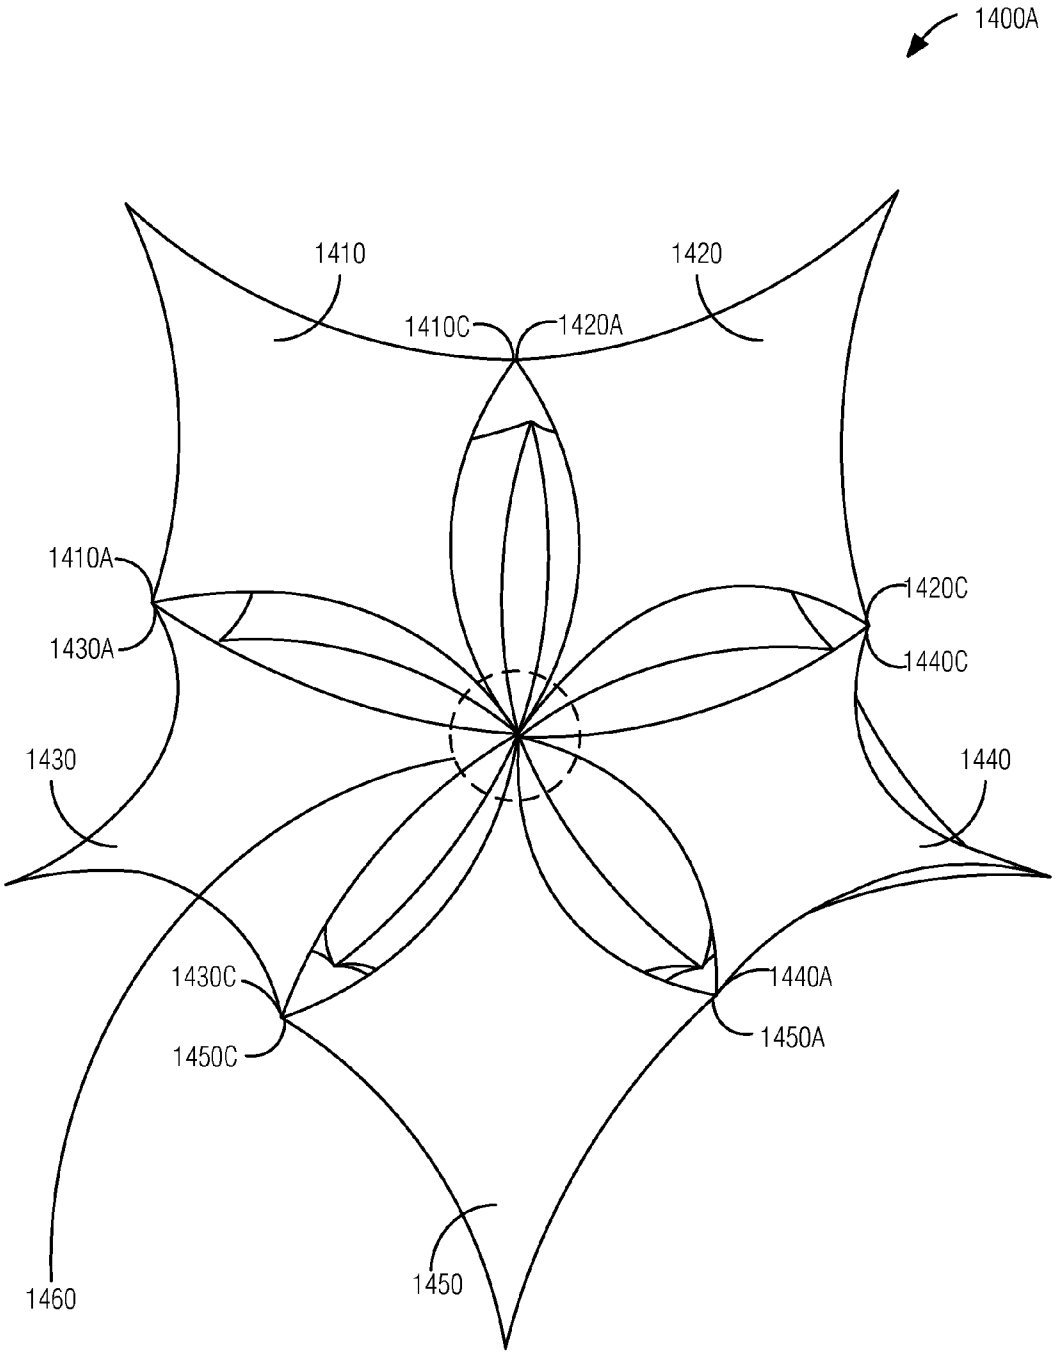
1400A
1410
1420
1410C
1420A
1410A
1420C
1430A
1440C
1430
1440
1430C
1440A
1450C
1450A
1460
1450

FIG. 14A

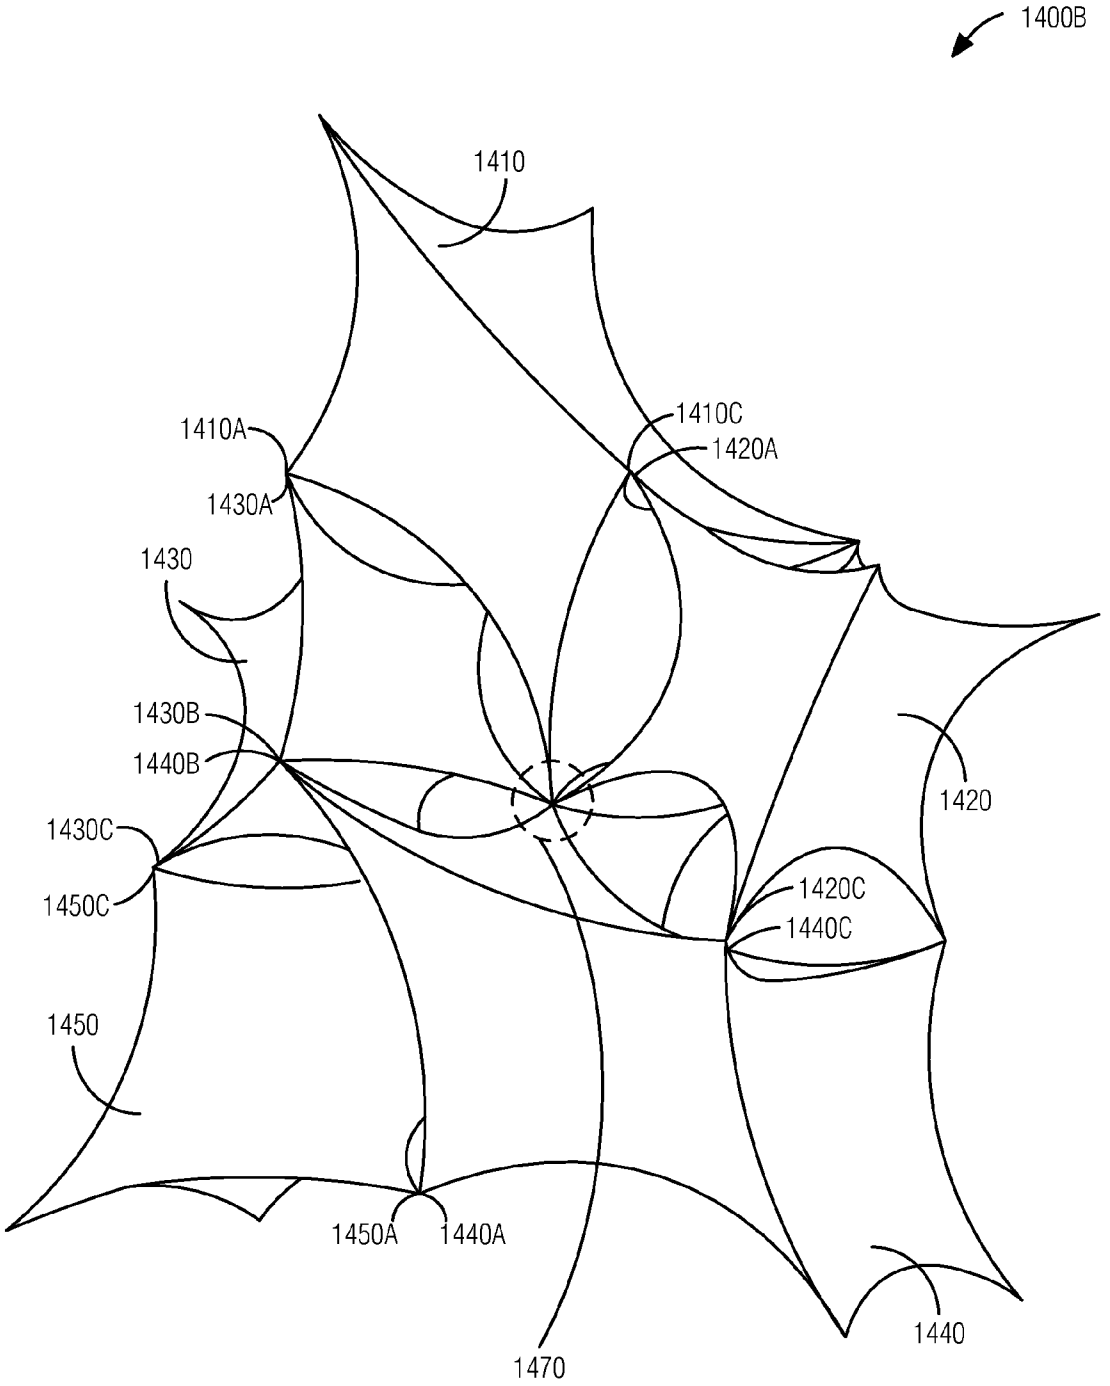
1400B
1410
1410A
1410C
1420A
1430A
1430
1430B
1440B
1420
1430C
1450C
1420C
1440C
1450
1450A
1440A
1440
1470

FIG. 14B

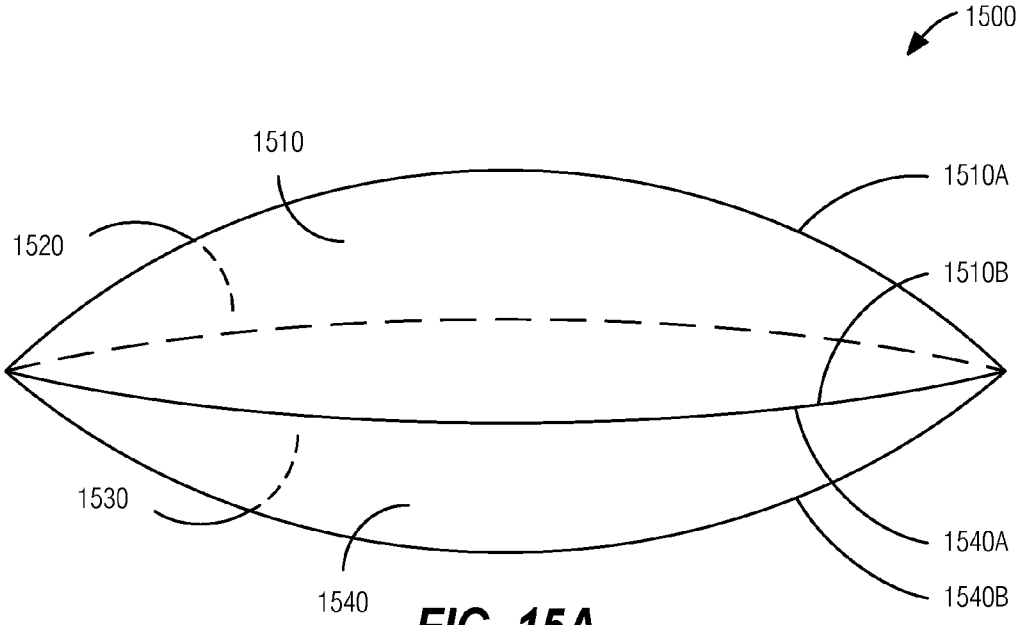


FIG. 15A

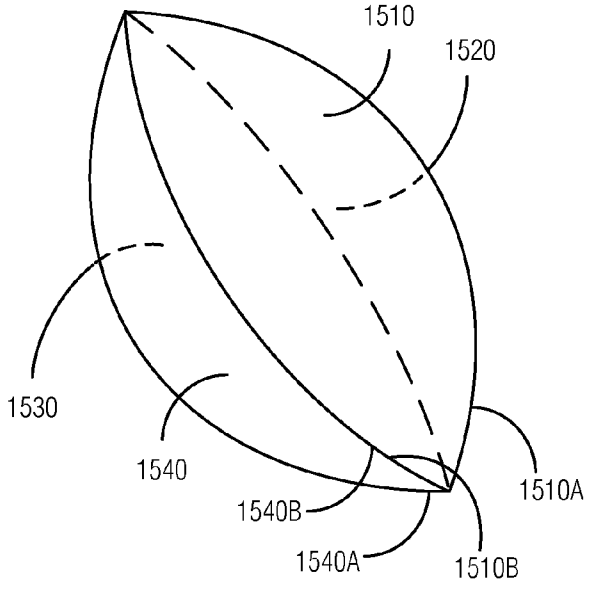


FIG. 15B

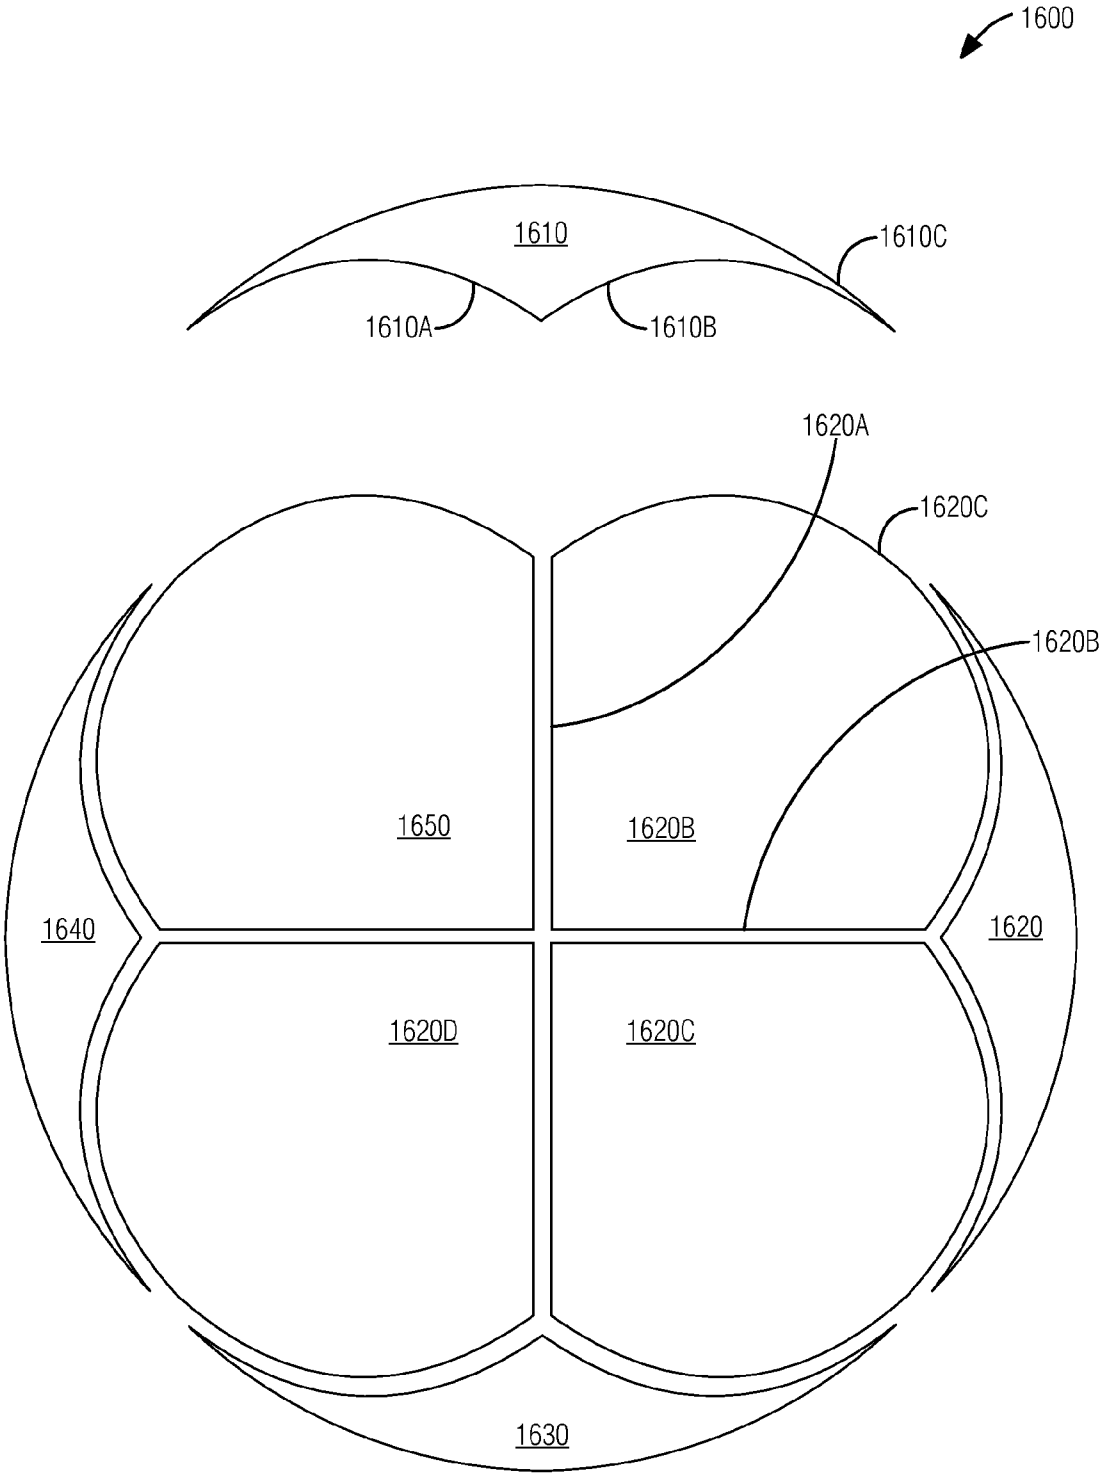
1600
1610
1610C
1610A
1610B
1620A
1620C
1620B
1650
1620B
1640
1620
1620D
1620C
1630

FIG. 16

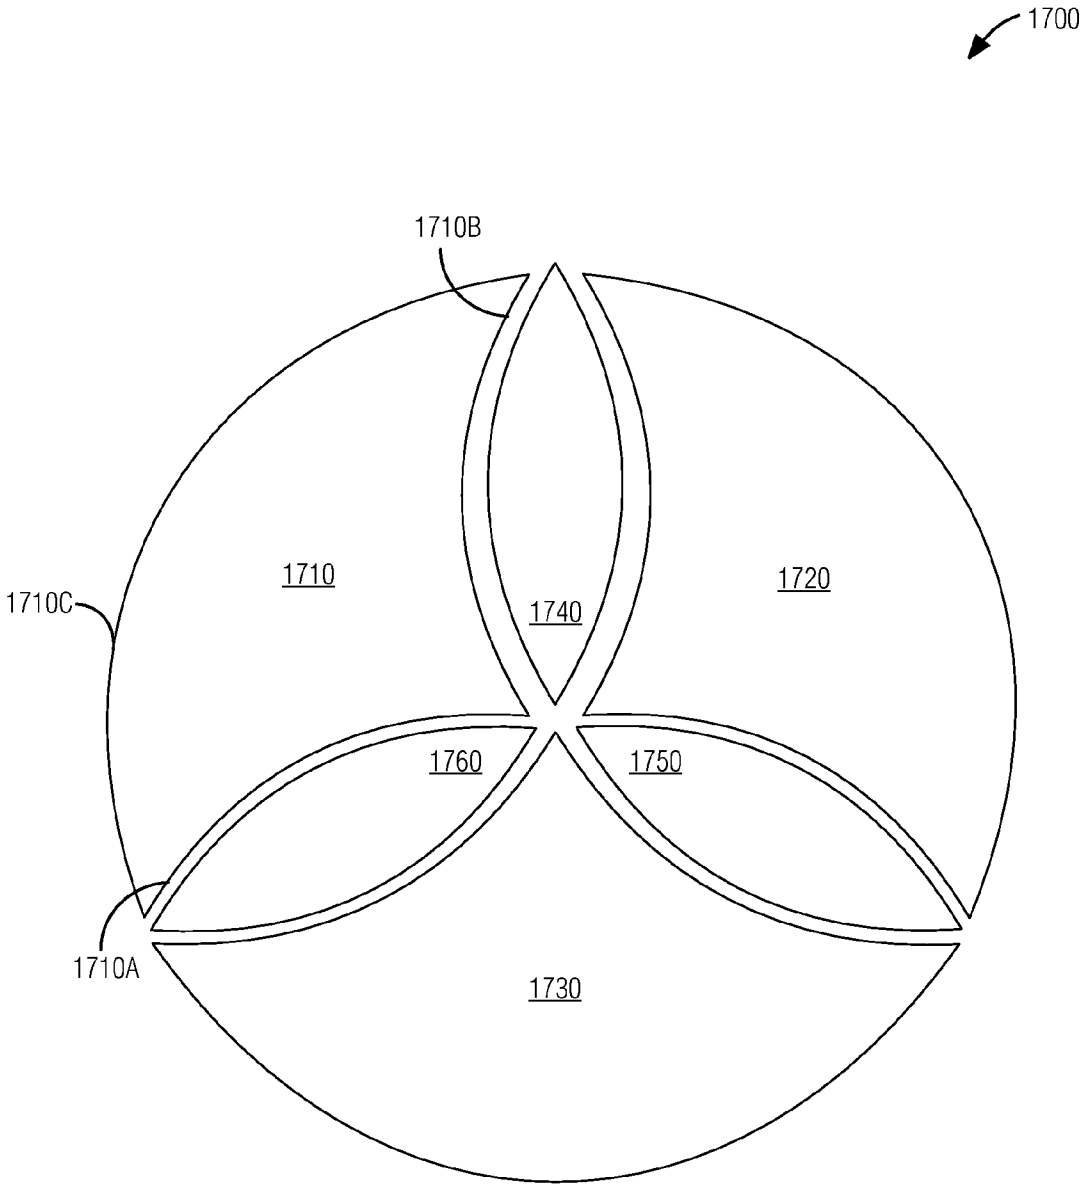


FIG. 17

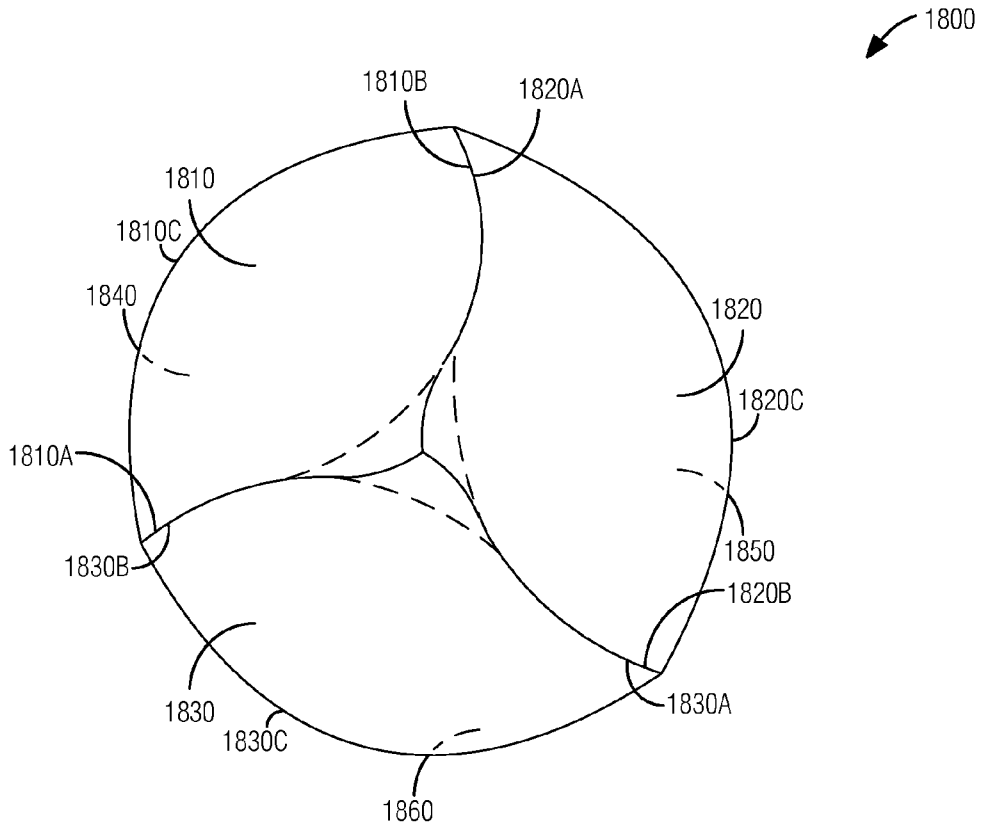


FIG. 18A

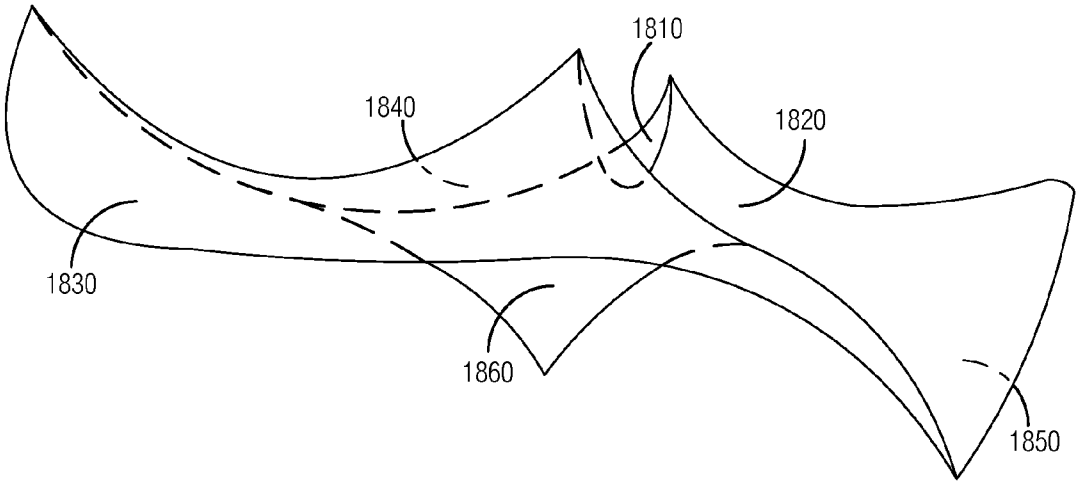


FIG. 18B

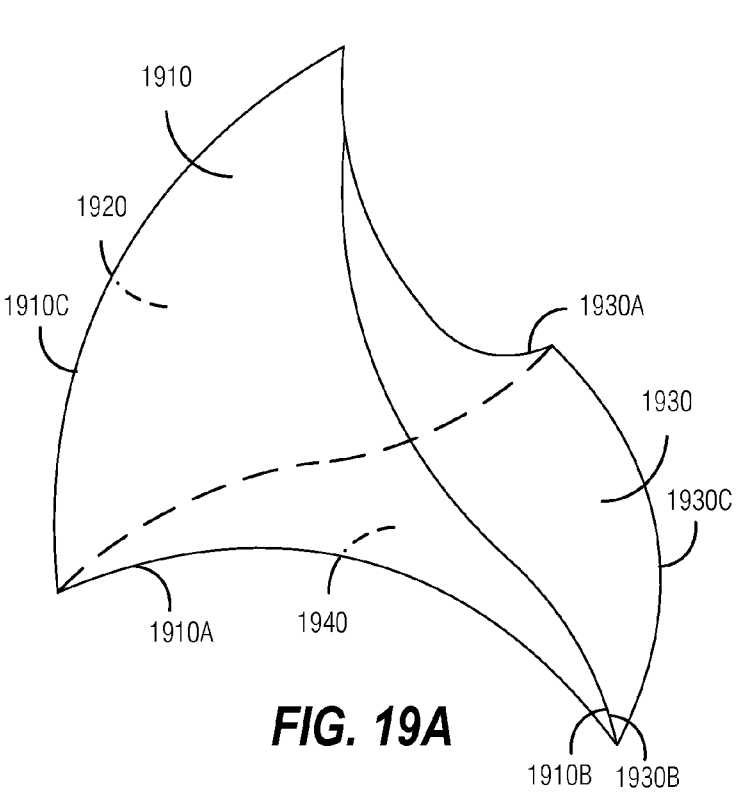


FIG. 19A

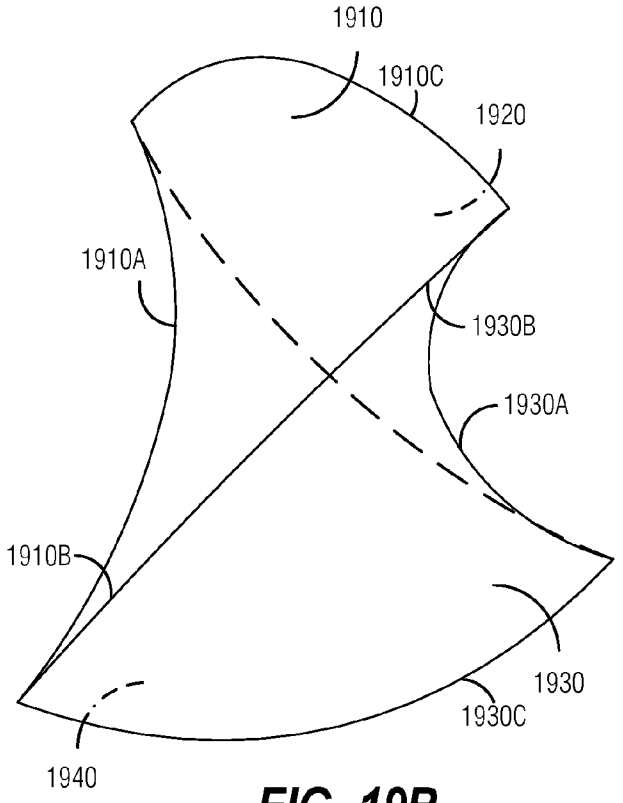


FIG. 19B

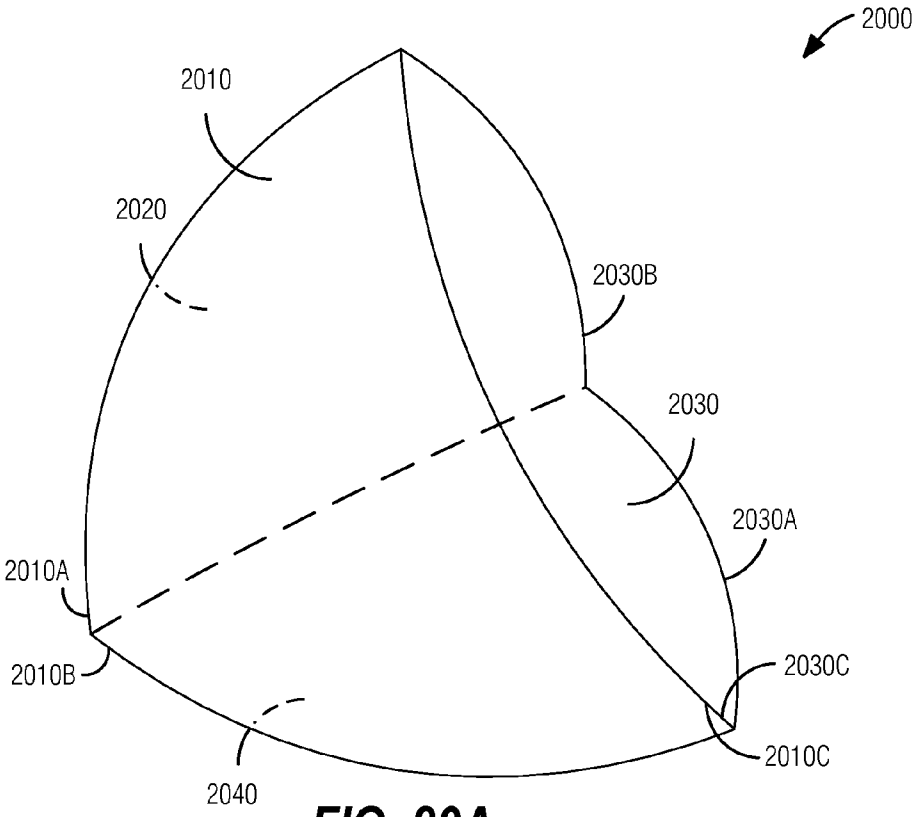


FIG. 20A

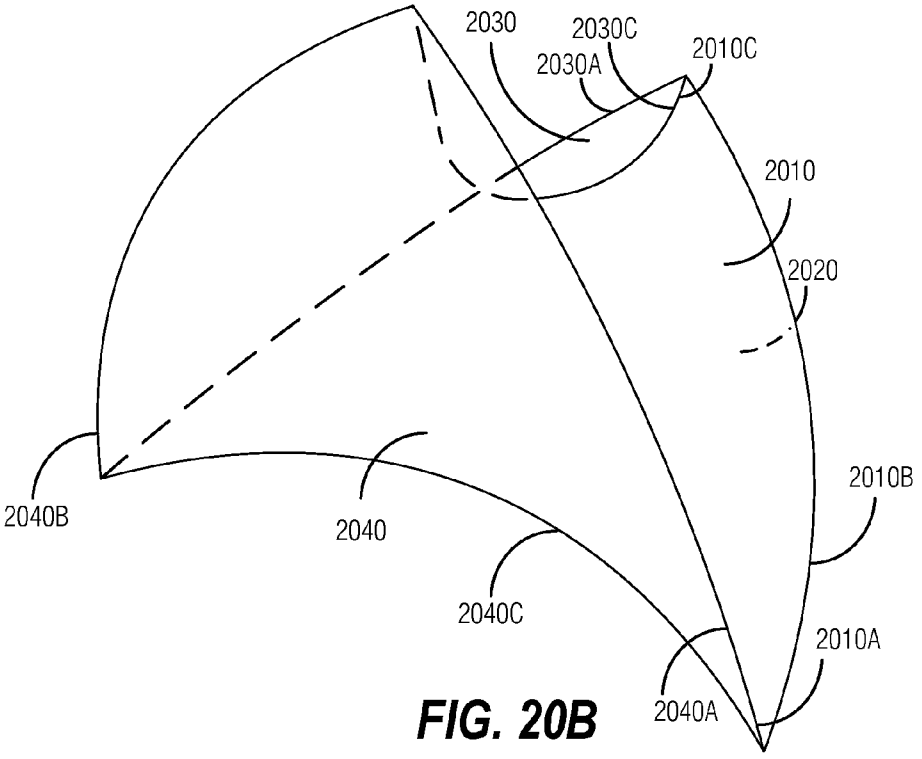


FIG. 20B

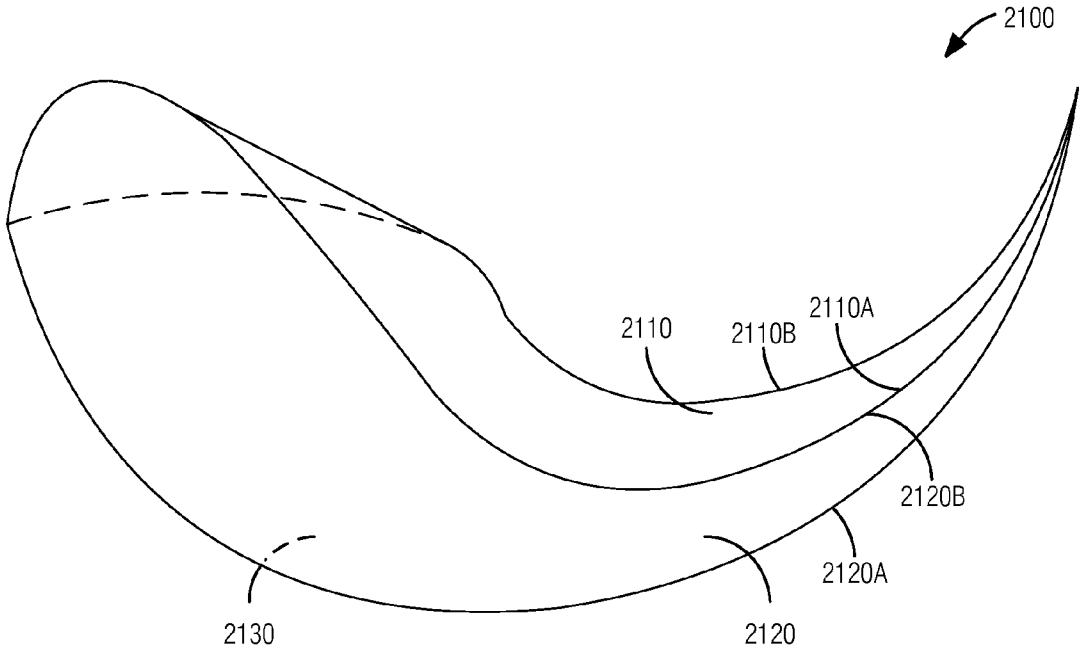


FIG. 21A

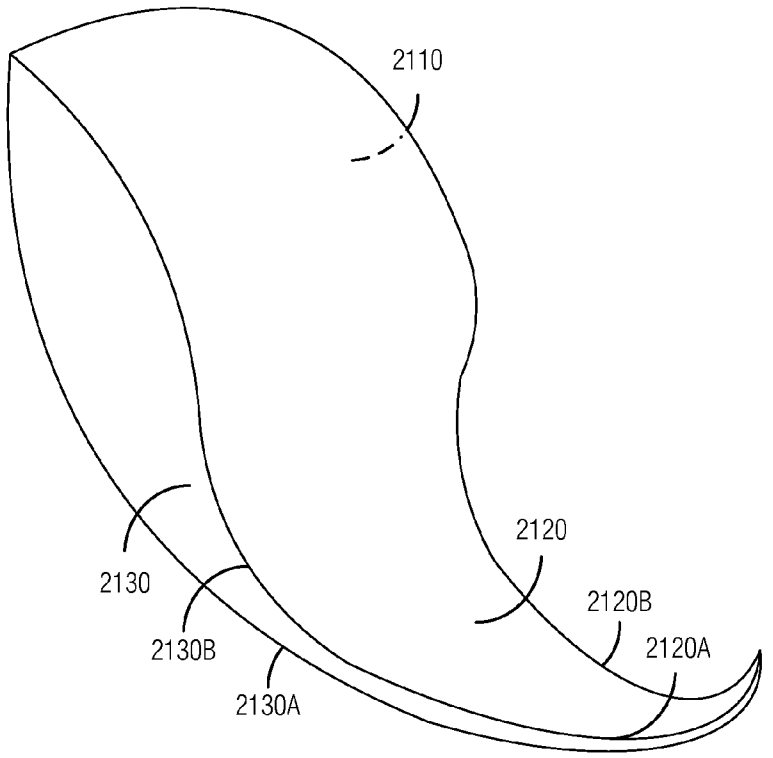


FIG. 21B

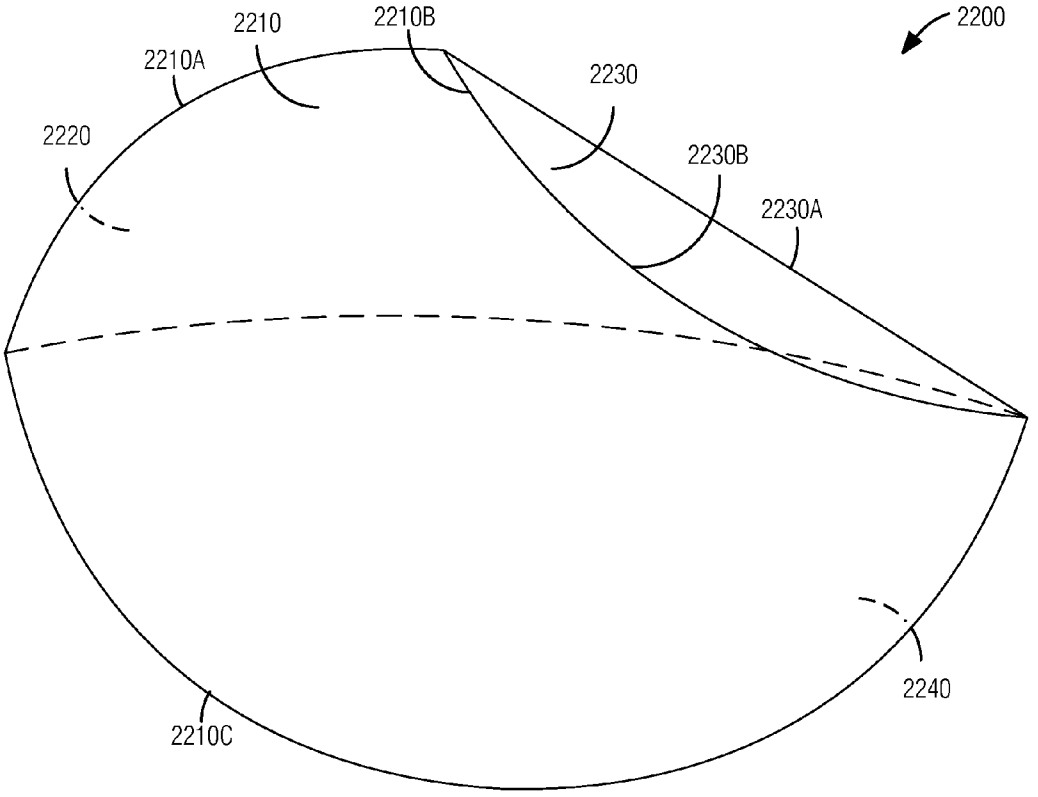


FIG. 22A

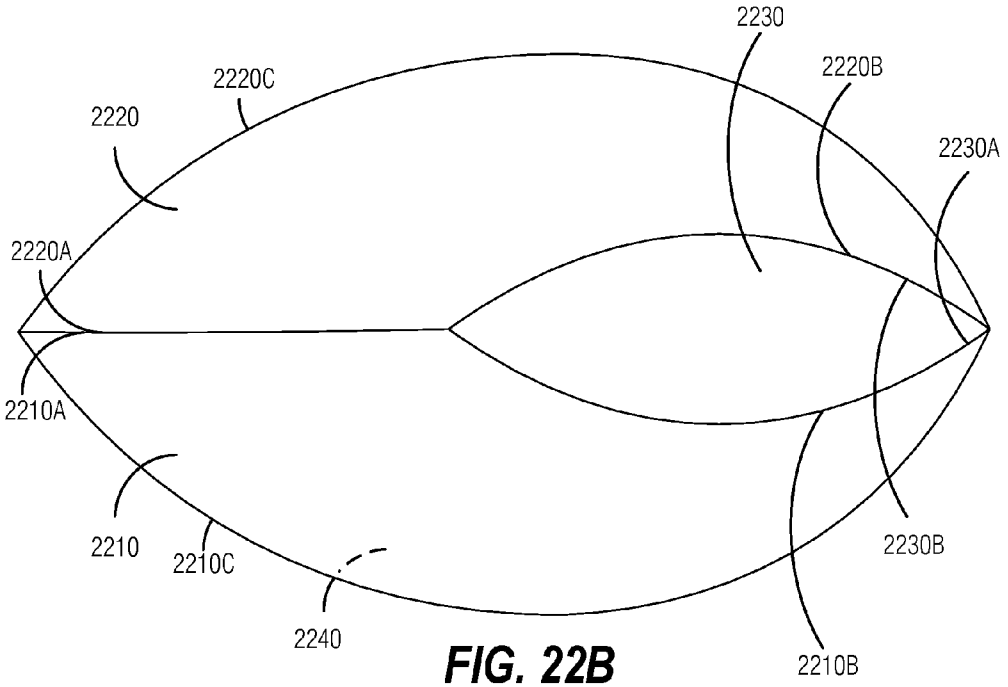


FIG. 22B

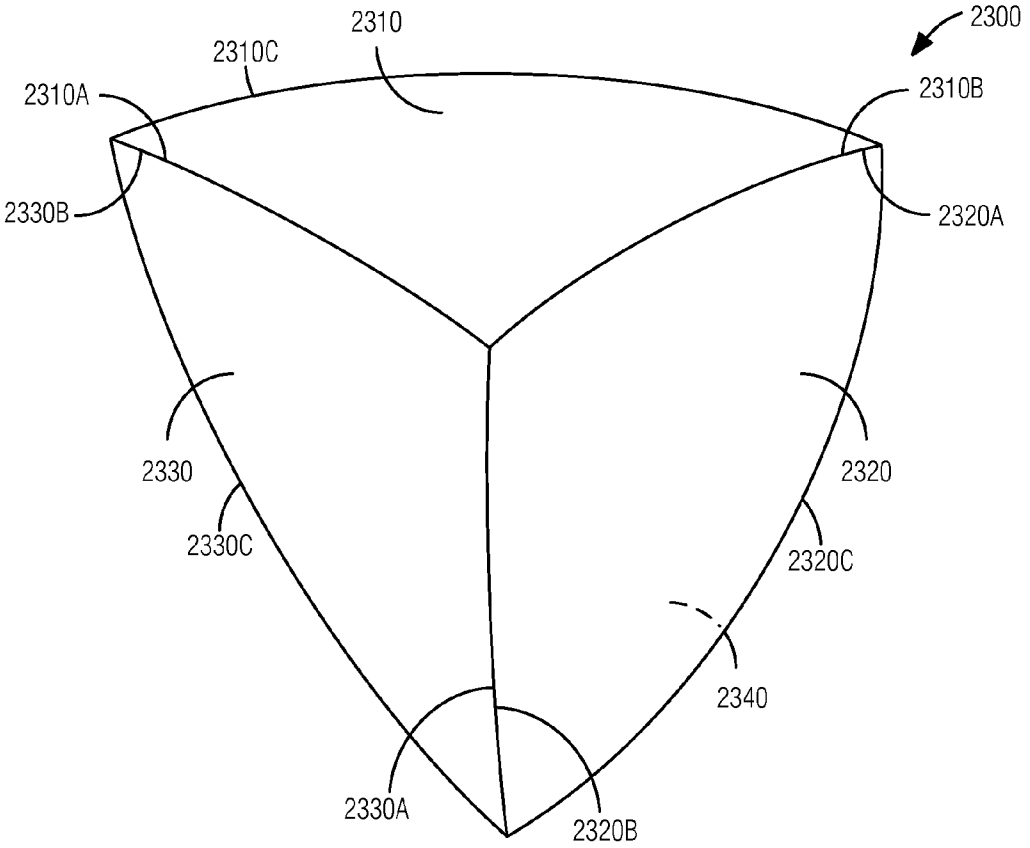


FIG. 23A

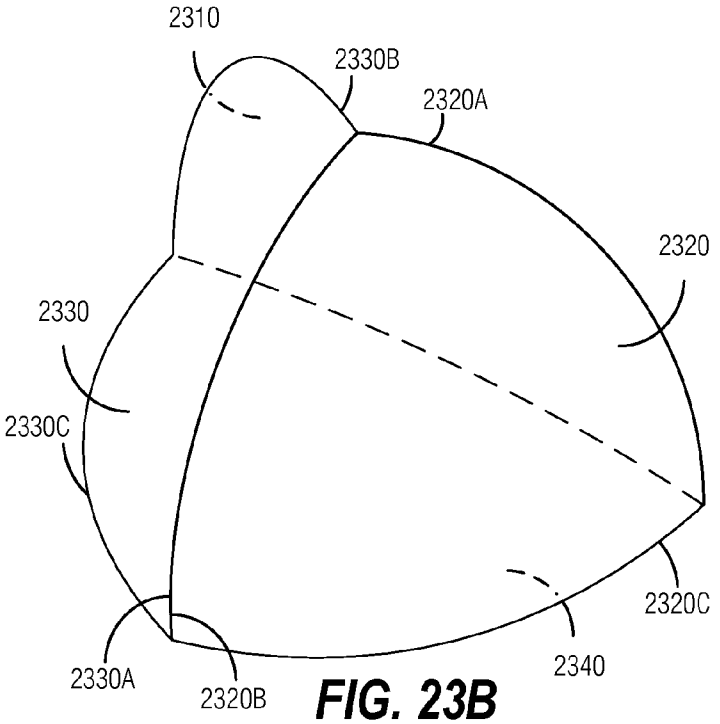


FIG. 23B

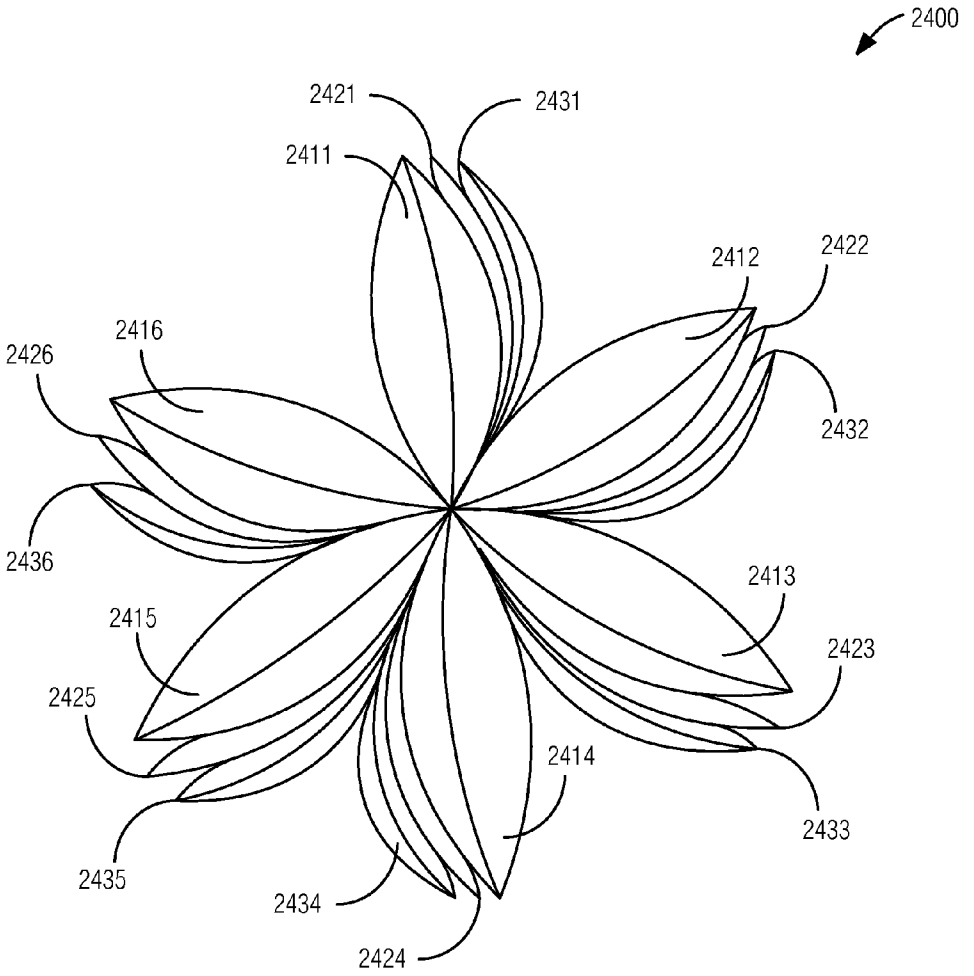


FIG. 24A

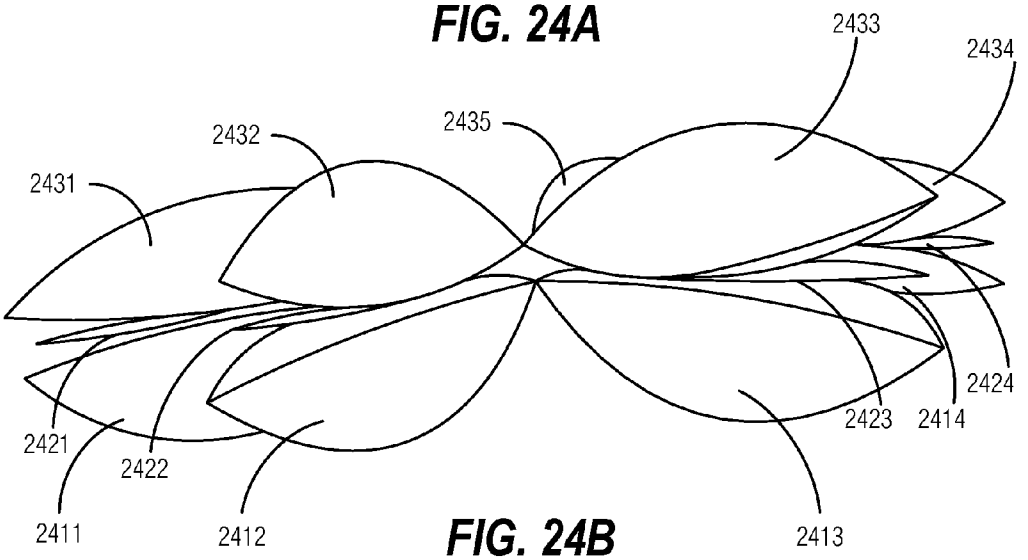


FIG. 24B

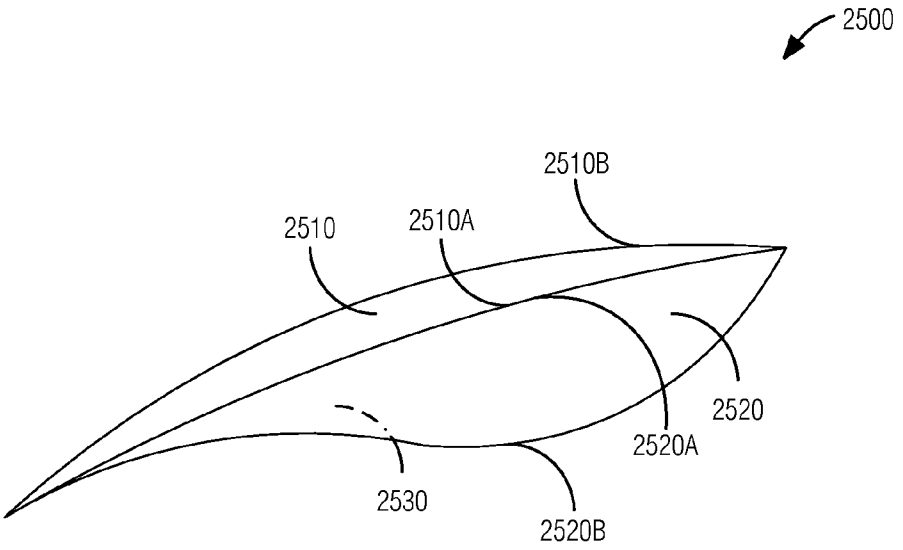


FIG. 25A

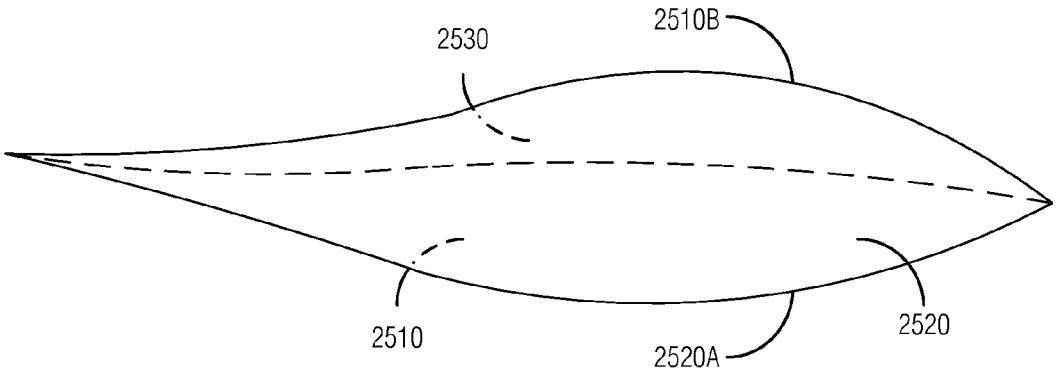


FIG. 25B

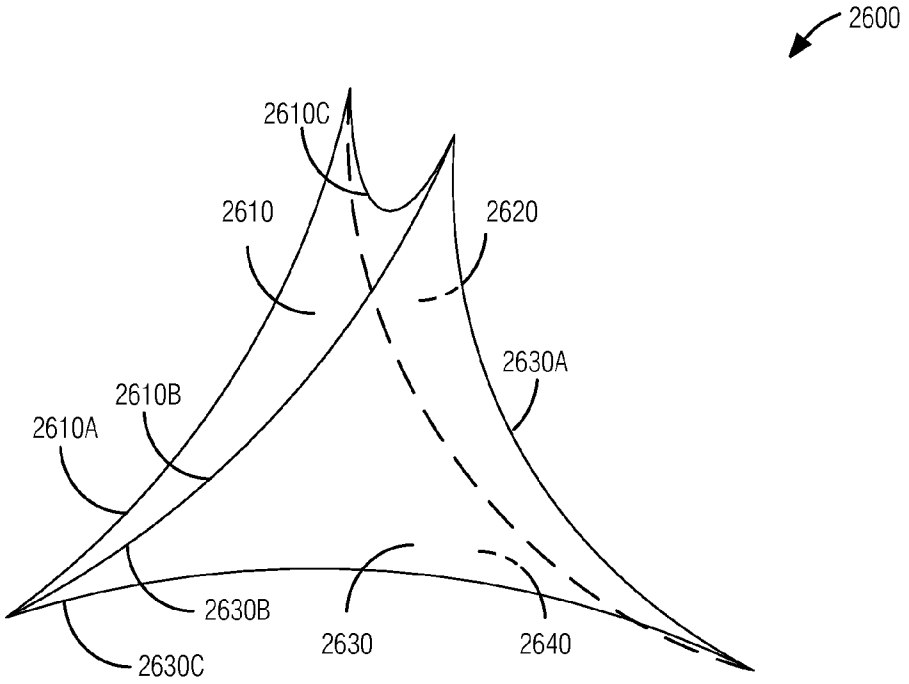


FIG. 26A

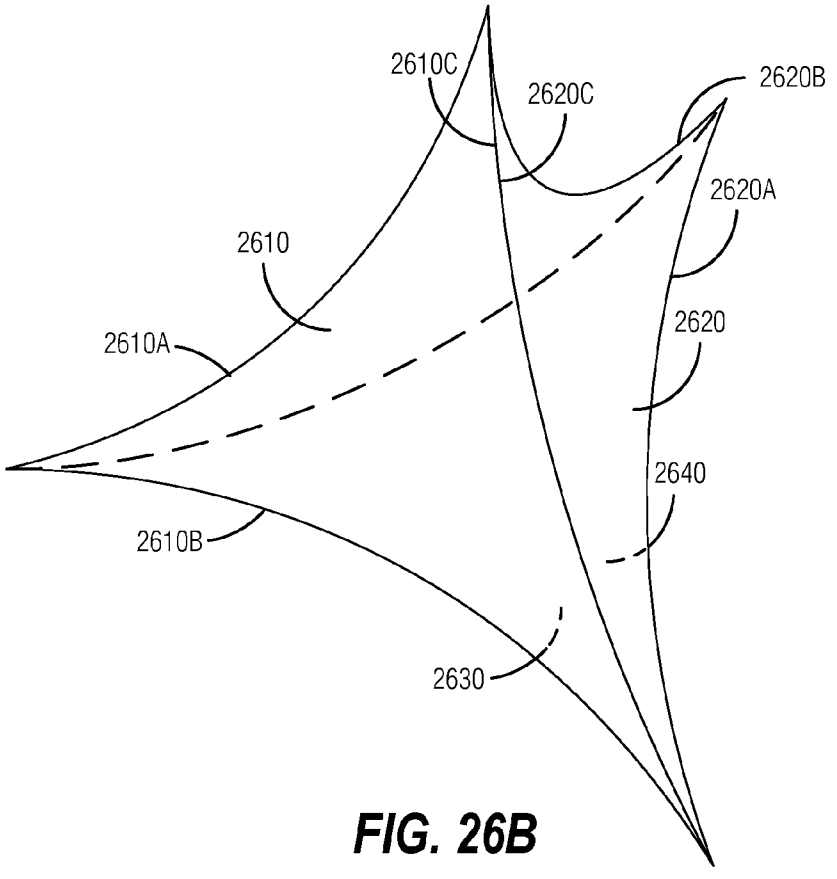


FIG. 26B

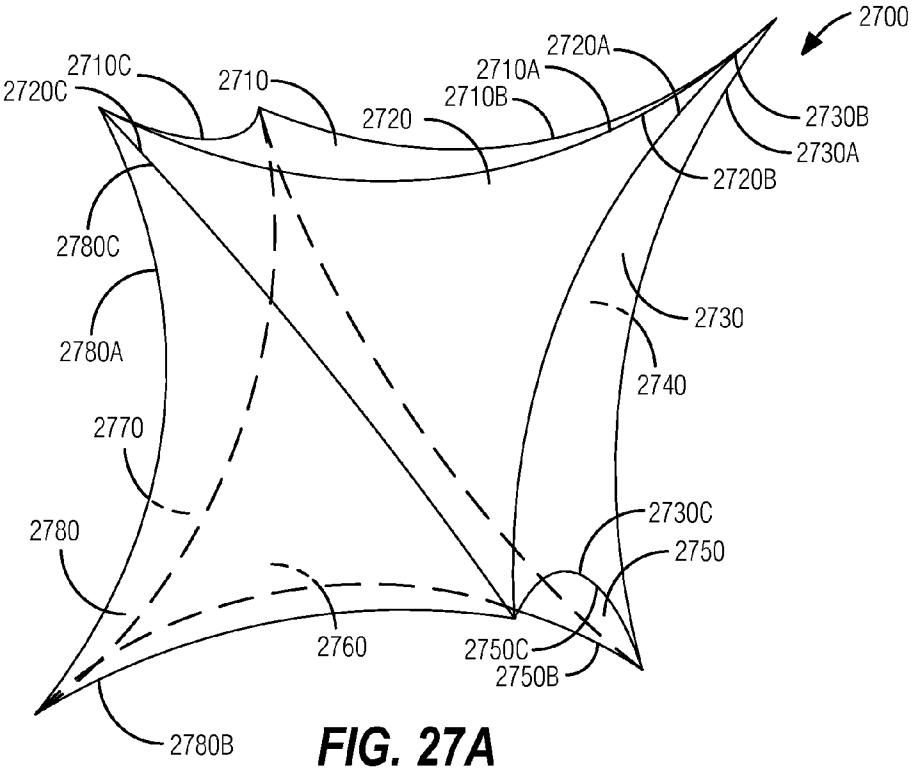


FIG. 27A

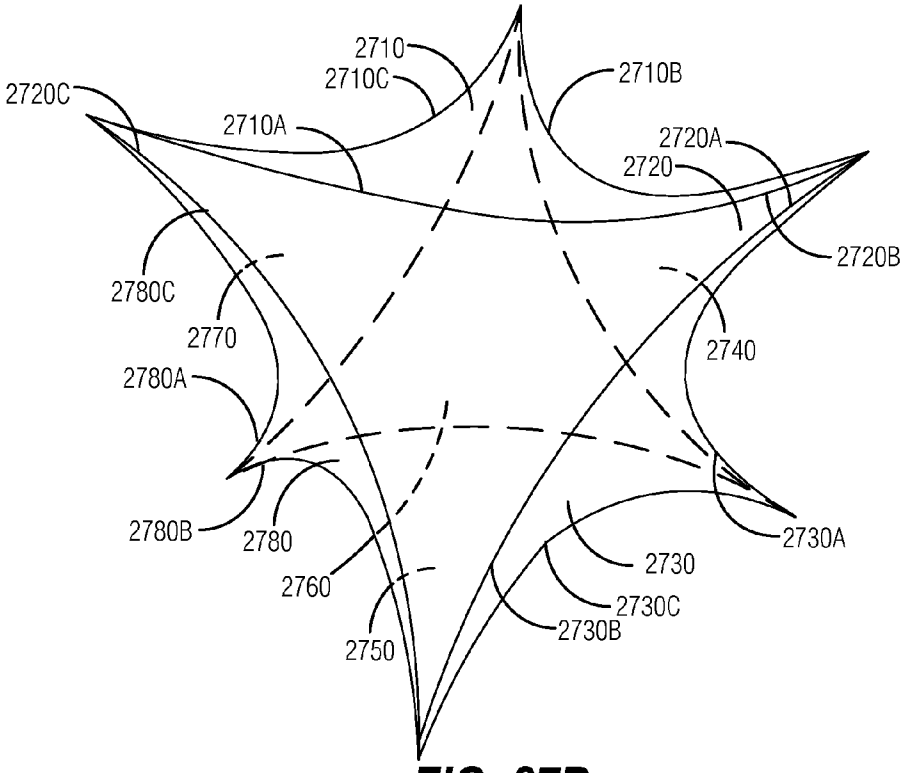


FIG. 27B

# SYSTEMS AND METHODS FOR ENHANCED BUILDING BLOCK APPLICATIONS

## CROSS-REFERENCE TO RELATED APPLICATIONS

**[0001]** The present application is related to U.S. patent application Ser. No. 14/170,372, filed Jan. 31, 2014, which is a continuation-in-part of U.S. patent application Ser. No. 14/089,599, filed Nov. 25, 2013, which is a continuation-in-part of U.S. patent application Ser. No. 14/029,630, filed Sep. 17, 2013, the entire disclosures of which are incorporated herein by reference.

## FIELD

**[0002]** The present invention relates to building blocks, and specifically to magnetic educational toy blocks.

## BACKGROUND

**[0003]** Building blocks may be assembled in various configurations to form different geometric structures. Groups of building blocks may be used as an educational toy by children, or may be used by adults or children to explore various two-dimensional or three-dimensional shapes.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0004]** FIG. **1** is a front view of a first set of shapes that may be used to form a first enhanced building block.

**[0005]** FIGS. **2**A-**2**B are perspective views of a first example enhanced building block.

**[0006]** FIGS. **3**A-**3**B are perspective views of a second example enhanced building block.

**[0007]** FIG. **4** is a front view of a second set of shapes that may be used to form a second enhanced building block.

**[0008]** FIG. **5** is a perspective view of a tetrahedral building block used to form one or more enhanced building blocks.

**[0009]** FIG. **6** is a perspective view of a third example enhanced building block formed from a tetrahedral building block.

**[0010]** FIG. **7** is a front view of a third set of shapes that may be used to form a third enhanced building block.

**[0011]** FIG. **8** is a front view of a fourth set of shapes that may be used to form a fourth enhanced building block.

**[0012]** FIG. **9** is a perspective view of a fourth example enhanced building block.

**[0013]** FIGS. **10**A and **10**B are front views of disassembled fifth example enhanced building block.

**[0014]** FIG. **11** is a front view of an assembled curvilinear tetrahedral enhanced building block.

**[0015]** FIG. **12** is a front view of a fifth set of shapes that may be used to form an enhanced building block.

**[0016]** FIGS. **13**A-**13**B are perspective views of a sixth example enhanced building block.

**[0017]** FIGS. **14**A-**14**B are views of an enhanced building block combination.

**[0018]** FIGS. **15**A-**15**B are perspective views of a seventh example enhanced building block.

**[0019]** FIG. **16** is a front view of a sixth set of shapes that may be used to form an enhanced building block.

**[0020]** FIG. **17** is a front view of a seventh set of shapes that may be used to form an enhanced building block.

**[0021]** FIGS. **18**A-**18**B are views of an eighth example enhanced building block.

**[0022]** FIGS. **19**A-**19**B are perspective views of a ninth example enhanced building block.

**[0023]** FIGS. **20**A-**20**B are perspective views of a tenth example enhanced building block.

**[0024]** FIGS. **21**A-**21**B are perspective views of an eleventh example enhanced building block.

**[0025]** FIGS. **22**A-**22**B are views of a twelfth example enhanced building block.

**[0026]** FIGS. **23**A-**23**B are perspective views of a thirteenth example enhanced building block.

**[0027]** FIGS. **24**A-**24**B are perspective views of a fourteenth example enhanced building block.

**[0028]** FIGS. **25**A-**25**B are perspective views of a fifteenth example enhanced building block.

**[0029]** FIGS. **26**A-**26**B are perspective views of a sixteenth example enhanced building block.

**[0030]** FIGS. **27**A-**27**B are perspective views of a seventeenth example enhanced building block.

## DETAILED DESCRIPTION

**[0031]** Enhanced building blocks may be formed from one or more basic shapes. Enhanced building blocks may include magnetic materials (e.g., magnets, ferromagnetic metals), piezoelectric materials, or lights (e.g., LEDs). Enhanced building blocks may be combined to form or give the appearance of various geometric structures, and the included magnetic materials may be used to retain the formed geometric structure shape. An enhanced building block may be formed from a tetrahedral building block, and may be referred to as an "un-shape" building block.

**[0032]** In the following description, reference is made to the accompanying drawings that form a part hereof, and in which is shown by way of illustration specific embodiments that may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be utilized and that structural, logical, and electrical changes may be made without departing from the scope of the present invention. The following description of example embodiments is, therefore, not to be taken in a limited sense, and the scope of the present invention is defined by the appended claims.

**[0033]** Multiple enhanced building blocks may be combined using a template (e.g., visual guide). The template may serve as an outline for various arrangements of enhanced devices. The template may include a continuous background of a particular color, or the template may include one or more lines to suggest a preferred arrangement of enhanced devices, such as is shown in FIG. **1**. The template may be two-dimensional or three-dimensional. For example, the template could be shaped as a flat circle or square, or the template could be shaped as a hemisphere or open cube. The template may be designed to accommodate one or more two-dimensional or three-dimensional enhanced devices. For example, multiple curved enhanced devices may be arranged to fill a hemispherical template. Variously shaped surfaces may be formed from a two-dimensional template, and the surfaces may be connected on a portion of their surface or along a portion or entire length of an edge to form three-dimensional shapes.

**[0034]** FIG. **1** is a front view of a first set of shapes **100** that may be used to form a first enhanced building block, according to an embodiment. In an embodiment, a circular shape is separated using a plurality of arcs to form one or more shapes **110**, **120**, **130**, and **140**. Edges of shapes are referenced using

incremental reference letters corresponding to each shape, such as the two edges of shape **110** are edge **110**A and edge **110**B, and the four edges of shape **120** are edges **120**A-**120**D. This reference numeral and letter convention is applied throughout this disclosure.

**[0035]** The arcs used to form various shapes may be of integer multiple arc lengths. For example, arc **110**A may be congruent to arc **110**B, **120**A-**120**D, and **130**A-**120**B, and may be half of the arc length of **130**A and **140**A-B. In this example, arcs **110**A, **120**D, **130**A, and **140**B form the circumference of the circle, and therefore arcs **110**A and **120**D may subtend angles of thirty degrees each and arcs **130**A and **140**B may subtend angles of sixty degrees each. In other examples, arcuate members may be circular arcs described by a constant radius consistent with a circle, may be described by major and minor radii consistent with an ellipse, or may be described by another shape. The arcuate member shapes may be selected to coincide with other arcuate members, either in coupling together to form a two-dimensional shape or in coupling together to form a three-dimensional shape with one or more common vertices. For example, arc **110**A may be congruent to arc **110**B, allowing adjacent edges of three copies of shape **110** to couple together to form the building block shown in FIGS. **2**A-**2**B. Similarly, arcs **120**A-D may be mutually congruent, allowing adjacent edges of four copies of shape **120** to form the building block shown in FIGS. **3**A-**3**B.

**[0036]** FIGS. **2**A-**2**B are perspective views of a first example enhanced building block **200**, according to an embodiment. A basic enhanced building block **200** may be formed by coupling three of the elliptical shapes **110** shown in FIG. **1** along the entire length of their edges. Each of the surfaces may be warped by coupling edges and vertices to form a three-dimensional figure, such as connecting edges **110**A and **110**B of surface **110** to corresponding edges of shapes **120** and **130**. The side perspective view shown in FIG. **2**A presents the first shape **110** to the viewer, where second surface **120** and third surface **130** are behind first surface **110**. The top perspective view shown in FIG. **2**B shows the first surface **110** and second surface **120**, occluding the third surface **130**. Additional shapes may be used, and additional surfaces may be combined to form other shapes. In an embodiment, a fourth elliptical shape may be used to form a four-sided enhanced building block that resembles a football, such as shown in FIGS. **15**A-**15**B. In an embodiment, additional elliptical shapes may be used to form additional multi-sided enhanced building blocks.

**[0037]** In various embodiments, the enhanced building blocks may be transparent, may be translucent, may include a semi-transparent material comprised of a color, or may include a solid (e.g., opaque) material. One or more light emitting diodes (LEDs) **230** may be embedded within an enhanced two-dimensional surface or within an enhanced three-dimensional shape. The LEDs **230** may be bulb LEDs with two exposed contacts, may be substantially two-dimensional flexible organic light-emitting diode (OLEDs), or other types of LEDs. LEDs **230** may receive power through electrically conductive grid lines, where the grid lines may be mounted to an edge **120**B, may be arranged within the enhanced two-dimensional surface, or may be arranged within an inner space of the enhanced building block. Power may be provided to the LEDs through a power storage element (e.g., capacitor, battery) or through a power-generating element (e.g., solar cell **210**, piezoelectric component **240**). The electrically conductive grid lines may conduct power to the LEDs **230** for educational purposes. For example, two enhanced devices may detect proximity using a magnetic or other proximity detection mechanism, and the proximity detection may convey power to the LEDs **230** to indicate that the enhanced devices have been placed in the correct arrangement. The electrically conductive grid lines may serve as contour lines for educational purposes. For example, a two-dimensional surface with a grid pattern may be used to form one or more curved enhanced surfaces, and the curved enhanced surfaces will exhibit a visual distortion of the grid pattern according to the curvature of each surface. In another example, one or more enhanced surfaces may be formed using OLEDs or liquid crystal displays (LCDs), and may display various human-readable or machine-readable information.

**[0038]** The enhanced building block may alter its appearance based on the presence of electrical current, an electric or magnetic field, sound vibration, or other external force. The enhanced building block may include one or more piezoelectric components **240**, and this piezoelectric component **240** may convert between mechanical and electrical inputs. For example, a quartz piezoelectric element may be included at one or both of the two vertices in the enhanced building block **210**, and may be used to generate power for one or more LEDs **230**. The piezoelectric element **240** may be used for educational purposes. For example, two enhanced devices may detect proximity using a magnetic or other proximity detection mechanism, and the proximity detection may convey power to the piezoelectric element **240** to generate a sound to indicate that the enhanced devices have been placed in the correct arrangement. One or more mechanical or electromechanical resonant devices may be used to modify, propagate, amplify, or mitigate externally applied vibration. For example, a mechanical tuning fork may be used to amplify vibration induced in a piezoelectric element **240**.

**[0039]** In some embodiments, using electrochemical materials, application of an electrical current may transition one or more surfaces of the enhanced building block to translucent, clouded, or colored. A solid enhanced building block may be used to conduct vibration, such as in acoustic or other applications. For example, induced mechanical vibration may be used in vibration therapy. The enhanced building block may be constructed using a conductive material for various electrical applications. For example, one or more of the faces of the enhanced building block may be comprised of silicon, where the silicon is arranged to function as a resistor, inductor, capacitor, transistor, complete microchip (e.g., integrated circuit) **220**, or other electrical component. Multiple enhanced building blocks may be arranged to propagate conducted vibration. For example, a mechanical vibration may be generated by applying an electric current to a piezoelectric element **240** in a first building block, and this vibration may be conducted by the second building block and converted to an electrical impulse.

**[0040]** The enhanced building block may be made of a transparent material, and may be of a uniform or nonuniform thickness. The enhanced building block may include one or more photovoltaic cells (e.g., solar cells) **210**, and may be used in solar power applications. For example, the cross-section of the enhanced building block may be convex or concave, and may be used as a lens in various optical applications. The enhanced building block may include various color patterns. Various additional ornamental designs may be used on each surface of the enhanced building block. Various

designs may include lines comprised of magnetic tape, where information may be encoded or transferred using the magnetic tape. For example, standard magnetic tape encoders and readers may be used to record or read information encoded on a magnetic tape stripe on an exterior surface. Various designs may include lines comprised of electrically conductive materials, such as copper. The enhanced building block may be constructed using a flexible material to allow the three faces to expand or contract.

**[0041]** The lines within each enhanced device may be uniformly distributed. For example, a circular enhanced template may include a series of arcs radiating from the circle center to the circle radius, where each arc is spaced apart from adjacent arcs by forty-five degrees. Enhanced devices corresponding to this circular two-dimensional enhanced template may have corresponding arc portions, and the arc portions may aid the user in arranging the enhanced devices on the template. In other embodiments, the grid lines may be irregular in shape or spacing, may be configured in a fractal pattern, or may be configured in another arrangement.

**[0042]** The inner space may include one or more gasses, such as noble gasses or gasses that are translucent or colored. The inner space may include one or more fluids (e.g., gasses or liquids). The fluid may be selected according to its response to heating or cooling. In another example, a fluid with a high heat capacity may store energy received from solar heating, such as in concentrated solar power applications. The fluid may be selected according to its ability to change color or light absorption. For example, a suspended particle fluid may transition from a clouded appearance to a translucent appearance in the presence of an electrical voltage. Various levels of transparency or various shades of color may be used. The use of semi-transparent materials of various colors may allow the colors to be combined depending on orientation. For example, if the device is held so a blue face is superimposed on a yellow face, the object may appear green. Similarly, multiple enhanced building blocks may be combined to yield various colors. Multiple enhanced building blocks may be combined to form the appearance of various platonic solids, where the platonic solid appearance may depend on each enhanced building block's specific periodicities of motion and wave positions in time as indicated by the direction of particular intersecting linear projections. For example, the vertices of multiple enhanced building blocks may be combined to form a larger enhanced device.

**[0043]** FIGS. **3**A-**3**B are perspective views of a second example enhanced building block **300**, according to an embodiment. Using the four-sided shapes **120** shown in FIG. **1**, a basic enhanced building block **300** may be formed from six surfaces **310**, **120**, **330**, **340**, **350**, and **360** coupled along the entire length of their edges. The six surfaces **310**, **120**, **330**, **340**, **350**, and **360** may be arranged analogous to the six surfaces of a cube, though each four-sided shape **120** may be curved (e.g. warped) to allow its edges to meet the edges of each adjacent surface. The side perspective view shown in FIG. **3**A presents the first, second, and third surfaces **310**, **120**, and **330** to the viewer, where fourth, fifth, and sixth surfaces **340**, **350**, and **360** are occluded by the enhanced building block **300**. Surface **310** may be rotated toward the viewer to yield the top perspective view shown in FIG. **3**B. The top perspective view shown in FIG. **3**B presents surfaces **310**, **120**, **340**, and **360** to the viewer, where surfaces **330** and **350** are occluded by the enhanced building block **300**. Additional shapes may be used, and additional surfaces may be combined to form other shapes.

**[0044]** FIG. **4** is a front view of a second set of shapes **400** that may be used to form a second enhanced building block, according to an embodiment. In an embodiment, a circular shape is separated using a plurality of arcs to form one or more shapes. Two or more of these shapes may be mutually congruent, such as **410**-**414** or **420**-**422**. Other shapes may be mutually distinct, including **430**, **440**, or **450**. The arcs used to form various shapes may be of integer multiple arc lengths. For example, all of the arcs shown in FIG. **4** may be congruent circular arcs, may be described by a constant radius consistent with a circle, may be described by major and minor radii consistent with an ellipse, or may be described by another shape. In addition to forming one or more three-dimensional enhanced devices using a combination of these two-dimensional shapes, these shapes may be formed from a tetrahedral building block, such as is shown in FIG. **5**.

**[0045]** FIG. **5** is a perspective view of a tetrahedral building block **500** used to form one or more enhanced building blocks. As described in the Related Applications referenced above, the tetrahedral device may include a tetrahedral inner volume with triangular surfaces **530** and elliptical flanges **510**-**530**. The triangular surfaces **530** may be formed using scalene, isosceles, or equilateral triangles, where each equilateral triangle interior angle is one hundred and twenty degrees. Various devices may be created by adding or removing various shapes or by expanding or contracting the inner tetrahedral volume, such as is shown in FIG. **6**.

**[0046]** FIG. **6** is a perspective view of a third example enhanced building block **600** formed from a third tetrahedral building block, according to an embodiment. An enhanced device may be formed by contracting the inner volume of a tetrahedral device. For example, by contracting the tetrahedral inner volume of a tetrahedral device, various surfaces shown in FIG. **4** may be created, such as **410**-**414** and **430**. The three contracted triangular faces **430** may define an inner volume, where edges of shapes **410**-**414** may share an entire length of edge **410**A-**410**C to form elliptical flanges. Each flange may be constructed using a semi-flexible or inflexible material and connected at each triangle contracted triangular face using a hinge, where the hinge may be constructed using a flexible material or a mechanical hinge. The flanges may be collapsed (e.g., closed) toward the inner volume of the enhanced building block, and may become flush (e.g., coplanar) with the respective contracted triangular surfaces. A fluid within the inner volume may expand or contract and cause one or more flanges to open or close.

**[0047]** The flanges may be collapsed or opened fully or partially through various methods. The flanges may be collapsed or opened by various active mechanical or electromechanical devices. These devices may include hydraulic actuators, servos, or other mechanical or electromechanical means. For example, the flanges or inner tetrahedral surfaces may contain magnetic or electromagnetic material, and one or more electromagnets may be energized selectively to collapse or open one or more flanges. An electromagnetic field may be used to cause movement of one or more flanges, or may be used to arrange two or more enhanced devices in a predetermined configuration. In embodiments where the flanges define an inner volume, the flanges may be collapsed or opened by heating or cooling a fluid (e.g., increasing or decreasing molecular vibration) contained within the enhanced. For example, the fluid may be heated using solar

energy, and the expanding fluid may fill the flanges and cause them to open. The flanges may be collapsed or opened by various passive methods, such as collapsing and opening opposing flanges alternatingly in response to a fluid. For example, a moving fluid such as wind may open a flange and cause the enhanced device to rotate around its axis of symmetry, and as the flange rotates into the wind, the wind may collapse that flange.

**[0048]** In some embodiments, the contracted triangular surfaces may also be collapsed or removed to allow nesting (e.g., stacking) of two or more enhanced building blocks. Two or more enhanced building blocks may be nested, and may be connected at one or more connection points via mechanical, magnetic, or by other means. For example, flange **410** may be a magnetic flange or may include a magnetic edge **410**B, and flange **410** may adhere to a ferromagnetic magnetic inner volume **430** on edge **430**C. Multiple enhanced devices may be nested on one or more of the vertices of the contracted triangular faces. For example, multiple devices may be nested on the three bottom vertices to form a tripod configuration, and multiple devices may be nested on the top vertex to form a vertical column. In an additional example, a second nested tripod configuration could be arranged on the vertical column, where each of the three tripod legs serves as a counterbalance for the other two tripod legs. Enhanced devices may be designed asymmetrically so that a series of enhanced building blocks may be connected to form a circle, polygon, or other shape. Any combination of nested enhanced devices may be used to form larger structures. Nested enhanced structures may be expanded or reinforced by adding additional shapes, such as those shown in FIG. **1**, **4**, or **7**.

**[0049]** FIG. **7** is a front view of a third set of shapes **700** that may be used to form a third enhanced building block, according to an embodiment. A fan shape **710** may be formed by removing three curved shapes **720**A-**720**C. Four fan shapes may be combined to form a three-dimensional enhanced building block, such as is shown in FIG. **11**. The three curved shapes **720**A-**720**C may be combined to form a three-dimensional enhanced building block, such as is shown in FIGS. **21**A-**21**B.

**[0050]** FIG. **8** is a front view of a fourth set of shapes **800** that may be used to form a fourth enhanced building block, according to an embodiment. In an embodiment, a circular shape is separated using a plurality of arcs to form seven shapes, including a central six-pointed shape **810**. The arcs may form two or more mutually congruent shapes, such as **820**A-**820**F. Four of the two-dimensional six-pointed shapes **810** may be combined with other two-dimensional shapes to form one or more three-dimensional enhanced devices, such as is shown in FIG. **9**.

**[0051]** FIG. **9** is a perspective view of a fourth example enhanced building block **900**, according to an embodiment. Using four of the six-pointed shapes **810**, a basic enhanced building block **900** may be formed using a first surface **810**, a second surface **920**, a third surface **930**, and a fourth surface **940** coupled along the entire length of their edges. The perspective view shown in FIG. **9** presents the first and second surfaces **810** and **920** to the viewer, where the third surface **930** is behind the first and second surfaces **810** and **920**, and where the fourth surface **940** is on the bottom of the enhanced building block **900**. As shown by the straight dotted lines in FIG. **9**, the inner space in this fourth example enhanced building block **900** resembles the tetrahedral inner volume of a tetrahedral device. Though FIG. **9** shows each surface of the enhanced building block **900** using a six-pointed shape **810** with curved edges, a six-pointed shape with six straight edges may be used, such as a regular (e.g., equiangular and equilateral) hexagon. Additional embodiments using regular polygons may have a number of surfaces that are integer multiples of three, including the hexagon with sixty degree interior angles, a twelve-sided dodecahedron with thirty degree interior angles, a twenty-four sided icosikaitetragon with fifteen degree interior angles, et cetera. Different three-dimensional enhanced building blocks may be formed using any three or more two-dimensional shapes, including any combination of arbitrary shapes or regular or irregular close-chain polygons.

**[0052]** In some embodiments, multiple enhanced building blocks may be connected to form a closed chain polygon (e.g., triangle, square, pentagon, etc.). The building blocks may be connected to each other by magnetic means, by soldering, or by other means. Alternatively, the enhanced building blocks may be connected to a center hub using one or more spokes per enhanced building block. The connected building blocks may be configured to rotate around the center hub, such as in response to a fluid flow (e.g., gas or liquid). For example, the connected building blocks may be used in a turbine configuration, where each enhanced building block is configured to spill and catch air depending on the angles of the flanges and orientations of the enhanced devices to cause the connected enhanced building blocks to rotate. As another example, the connected building blocks may be used in a water wheel configuration, where water may contact outer flanges and cause the connected building blocks to rotate. The building blocks may be adjusted to change the angular velocity, rotational direction, or other response of the connected building blocks to movement of a fluid across the surface of the enhanced devices. Adjustments may include collapsing or opening individual flanges, or extending or retracting the respective building blocks relative to the hub. In embodiments where the building blocks are formed from or include a framework comprised of a conductive material, the connected building blocks may be arranged to form an antenna, such as for terrestrial or satellite communication. The connected building blocks may be used to conduct vibration, such as in acoustic applications, vibration therapy, or other applications. Other hydrodynamic or aerodynamic applications may be used. In addition to these macroscopic applications for a single or multiple enhanced building blocks, enhanced building blocks may be used in various microscopic applications such as nanotechnology. For example, multiple microscopic enhanced building blocks may be configured to arrange themselves in a predefined structure in the presence of a magnetic field. Similarly, multiple microscopic enhanced building blocks may be permanently arranged in a microscopic structure with predetermined properties, such as a resistor, inductor, capacitor, transistor, complete microchip, or other electrical component.

**[0053]** FIGS. **10**A and **10**B are front views of disassembled fifth example enhanced building blocks **1000**A and **1000**B, according to an embodiment. Disassembled fifth example enhanced building block **1000**A may be formed from four fan-shaped devices **1010**, **1020**, **1030**, and **1040** coupled along the entire length of their edges. Similarly, **1000**B may be formed from four fan-shaped devices **1020**, **1050**, **1060**, and **1070** coupled along the entire length of their edges. Each fan-shaped device may be formed from a circular template, such as the fan-shaped device **710** shown in FIG. **7**. FIG. **10**A is a front view of four identical fan-shaped devices **1010**,

**1020**, **1030**, and **1040**, where each fan-shaped device includes three sigmoid (S-shaped) surfaces **1010**A-**1010**C, **1020**A-**1020**C, **1030**A-**1030**C, and **1040**C-**1040**C. In contrast with FIG. **10**A, FIG. **10**B includes a sigmoid group and a reverse-sigmoid group. The sigmoid group includes two fan-shaped devices **1010** and **1060** that each include three sigmoid edges **1010**A-**1010**C and **1060**A-**1060**C. Similarly, the reverse-sigmoid groups includes two fan-shaped devices **1050** and **1070** that each include three reverse-sigmoid edges **1050**A-**1050**C and **1070**A-**1070**C.

**[0054]** Various edges may be coupled using adhesive, a chemical fixative, a magnetic coupling, or coupling through other means to form a three-dimensional building block. In an example, the two sigmoid fan-shaped devices **1010** and **1060** may be coupled along the entirety of an edge, such as coupling (e.g., attaching) the entire length of edge **1010**A to the entire length of edge **1060**A. The two sigmoid fan-shaped devices **1010** and **1060** may be coupled to form an acute angle with respect to each other, where the coupling of edges **1010**A and **1060**A cause a warping (e.g., deformation, curving) of the coupled edges and of the devices **1010** and **1060**. Similarly, the two reverse-sigmoid fan-shaped devices **1050** and **1070** may be coupled along the entirety of an edge, such as coupling the entire length of edge **1050**A to the entire length of edge **1070**A. The two reverse-sigmoid fan-shaped devices **1050** and **1070** may be coupled to form an acute angle with respect to each other, where the coupling of edges **1050**A and **1070**A cause a warping of the coupled edges and of the devices **1050** and **1070**. The coupled pair of sigmoid fan-shaped devices **1010** and **1060** may be coupled to the coupled pair of reverse-sigmoid fan-shaped devices **1050** and **1070** to form a curvilinear tetrahedral enhanced building block as shown in FIG. **11**. In another example, the curvilinear tetrahedral enhanced building block may be formed from the fan-shaped devices shown in FIG. **10**B by lifting the distal corners **1055**, **1065**, and **1075** toward the viewer and by connecting adjacent edges.

**[0055]** FIG. **11** is a front view of an assembled curvilinear tetrahedral enhanced building block **1100**, according to an embodiment. The curvilinear tetrahedral enhanced building block **1100** may be referred to as a "Whirl Maker" device. The curvilinear tetrahedral enhanced building block **1100** may be assembled using four fan-shaped devices **1010**, **1050**, **1060**, and **1070**. The four fan-shaped devices **1010**, **1050**, **1060**, and **1070** may be rigid, semi-rigid, or flexible to allow or conduct vibration or other mechanical displacements. The resulting curvilinear tetrahedral enhanced building block **1100** may be sealed to include an inert gas or other substance, where the substance may be selected based on conductivity, buoyancy, compressibility, or other substance characteristics.

**[0056]** The resulting shape includes four curved corners **1110**, **1120**, **1130**, and **1140**. Each of the curved corners **1110**, **1120**, **1130**, and **1140** may be rigid, semi-rigid, or flexible, and maybe configured to rotate around an axis. For example, corner **1100** may include a seam **1150** that allows rotation in a circular motion. The rotation may allow corner **1110** to be reoriented in a specific direction, or may allow corner **1110** to be rotated continually to generate a force against a surrounding fluid. This corner rotation force may be used to reorient the curvilinear tetrahedral enhanced building block **1100** within a fluid medium, such as within a viscous liquid. Each of the curved corners **1110**, **1120**, **1130**, and **1140** may induce motion independently, and the induced motion may be coordinated to cause the curvilinear tetrahedral enhanced building block **1100** to move within a fluid medium in a predetermined direction. For example, the curvilinear tetrahedral enhanced building block **1100** may be immersed in a fluid medium within a tetrahedral building block **500**, and motion induced by the curvilinear tetrahedral enhanced building block **1100** may enable a rotation of the curvilinear tetrahedral enhanced building block **1100** relative to the tetrahedral building block **500**.

**[0057]** The curvilinear tetrahedral enhanced building block **1100** may include one or more conductive elements. The conductive elements may be used to receive or generate an electric signal. For example, the curvilinear tetrahedral enhanced building block **1100** may be placed in a dielectric fluid, and conductive elements on the surface of the curvilinear tetrahedral enhanced building block **1100** may be used to send or receive signals through the dielectric fluid. The conductive elements may be used to convey or generate an electric or magnetic field. For example, electromagnetic material may be included within or on the surface of the curvilinear tetrahedral enhanced building block **1100**. The generation of an electric or magnetic field may cause surrounding fluid or particles to move in a direction determined by the field, such as using electrohydrodynamic or magnetohydrodynamic means. For example, an electrostatic field may be generated within a dielectric fluid, and the electrostatic field may cause electrohydrodynamic motion within the fluid. Alternatively, a dielectric fluid may be electrified, and a magnetic field may be used to cause magnetohydrodynamic motion within the fluid. The fluid motion may be induced independently by each of the curved corners **1110**, **1120**, **1130**, and **1140**, and the induced motion may be coordinated to cause the curvilinear tetrahedral enhanced building block **1100** to move within a fluid medium in a selected direction, around a selected axis of rotation, or both.

**[0058]** One or more resonant members may be used within the curvilinear tetrahedral enhanced building block **1100** to sustain or enhance the fluid propulsion. For example, a piezoelectric element **1160** may convert received mechanical vibration into an electric charge, and the electric charge may be used to control or power the generation of an electric field. A piezoelectric element **1160** may also be used to convert electrical energy into vibration, and the vibration may be used to induce motion in a surrounding fluid medium. For example, the timing of the positive and negative vibratory displacement of a portion of the curvilinear tetrahedral enhanced building block **1100** may be selected to induce motion in the surrounding fluid. One or more directional flanges may be used to enhance the force of the positive displacement while decreasing the effect of the negative displacement, such as one or more retractable fins that allow fluid flow in one direction but generate drag in the opposite direction. One or more of the four fan-shaped devices **1010**, **1050**, **1060**, and **1070** may be deformed passively or actively to generate lift or drag across the surface. For example, when directing fluid motion in the direction of one fan-shaped device **1010** (i.e., toward the viewer in FIG. **11**), the three other fan-shaped devices **1050**, **1060**, and **1070** may be distorted to enhance laminar fluid flow and reduce turbulent fluid flow.

**[0059]** FIG. **12** is a front view of a fifth set of shapes **1200** that may be used to form an enhanced building block, according to an embodiment. In an embodiment, a circular shape is separated using a plurality of arcs to form multiple examples of four shapes. The arcs may form four mutually congruent,

four-pointed shapes, such as **1210**-**1216**. Two of the arcs may form four mutually congruent, two-pointed ellipsoid shapes, such as **1220**-**1226**. Four mutually congruent, three-sided shapes may be formed, such as **1230**-**1236**. Similarly, four mutually congruent, three-sided shapes may be formed, such as **1240**-**1246**. One or more of these two-dimensional shapes may be combined with other two-dimensional shapes to form one or more three-dimensional enhanced devices, such as using six of the four-pointed shapes **1210** as shown in FIGS. **13**A-**13**B.

**[0060]** FIGS. **13**A-**13**B are perspective views of a sixth example enhanced building block **1300**, according to an embodiment. Using six of the four-sided shapes shown in FIG. **12** coupled along the entire length of their edges, a basic enhanced building block **1300** may be formed. The six surfaces may be arranged analogous to the six surfaces of a cube, though each four-sided shape may be curved to allow its edges to meet the edges of each adjacent surface. For example, edge **1310**A may meet surface **1330**, edge **1310**B may meet surface **1340**, edge **1310**C may meet surface **1350**, and edge **1310**D may meet surface **1320**. The side perspective view shown in FIG. **13**A presents the first, second, and third surfaces to the viewer, where fourth, fifth, and sixth surfaces are occluded by the enhanced building block **1300**. Surfaces may meet at vertex **1300**B, and the vertex **1300**B may be rotated clockwise to yield the top perspective view shown in FIG. **13**B. The top perspective view shown in FIG. **13**B presents three surfaces **1310**, **1350**, and **1360** to the viewer, where the remaining surfaces are occluded by the enhanced building block **1300**. Additional shapes may be used, and additional surfaces may be combined to form other shapes. Multiple sixth example enhanced building blocks **1300** may be combined on various vertices **1300**A-**1300**F to form an enhanced building block combination, such as is shown in FIGS. **14**A-**14**B.

**[0061]** FIGS. **14**A-**14**B are views of an enhanced building block combination **1400**A-**1400**B, according to an embodiment. The enhanced building block combination includes five of the sixth example enhanced building blocks **1300** connected at various vertices. Each of the lettered vertices in FIGS. **14**A-**14**B correspond to respective lettered vertices in FIG. **13**B. For example, vertex **1410**A corresponds to vertex **1300**A, **1410**C corresponds to vertex **1300**C, et cetera.

**[0062]** FIG. **14**A shows a front view of the enhanced building block combination **1400**A, whereas FIG. **14**B shows a perspective view of the enhanced building block combination **1400**B. Though enhanced building block combination **1400**A is symmetrical across a vertical plane into the page, FIGS. **14**A-**14**B are drawn to include perspective to facilitate description. Due to the complex arrangement of the five building blocks **1300** into enhanced building block combination **1400**A-**1400**B, it may be helpful to compare the locations of each of the five building blocks **1300** and common vertices by referring back and forth between FIGS. **14**A and **14**B. Block combination **1400**A in FIG. **14**A has been rotated to show block combination **1400**B in FIG. **14**B. For example, the bottom enhanced building block **1450** in FIG. **14**A is rotated away from the viewer to the left as shown in FIG. **14**B.

**[0063]** As shown in FIG. **14**A, all five building blocks **1300** are connected to each other on at least one vertex at a central location **1460**. Blocks **1410** and **1420** are connected on a first pair of vertices **1410**C and **1420**A. Blocks **1410** and **1430** are connected on a second pair of vertices **1410**A and **1430**A, and blocks **1420** and **1440** are connected on a third pair of vertices **1420**C and **1440**C. Similarly, blocks **1430** and **1440** are connected to block **1450** on a fourth pair of vertices **1430**C and **1450**C, and on a fifth pair of vertices **1440**A and **1450**A, and on.

**[0064]** As described above, FIG. **14**B shows the same block combination **1400**A rotated to the left to show a perspective view. FIG. **14**B shows the same set of vertices as shown in FIG. **14**A, including central location **1470**. While central location **1460** in FIG. **14**A includes several vertices including the frontmost pair of vertices **1430**B and **1440**B, the central location **1470** in FIG. **14**B includes only vertices **1410**G, **1420**G, **1430**H, **1440**H, and **1450**G.

**[0065]** FIGS. **15**A-**15**B are perspective views of a seventh example enhanced building block **1500**, according to an embodiment. A seventh example enhanced building block **1500** may be formed by warping and connecting four of elliptical shapes **1510**-**1540** coupled along the entire length of their edges. For example, the entire length of edge **1510**B may be connected to the entire length of **1540**A. Elliptical shapes **1510**-**1540** may be formed from four elliptical shapes congruent to shape **110** shown in FIG. **1**, from four elliptical shapes congruent to shape **410** shown in FIG. **4**, or from other elliptical shapes. The side perspective view shown in FIG. **15**A presents the first two surfaces **1510** and **1540** to the viewer, where the third and fourth surfaces **1520** and **1530** are behind first surface. Similarly, the top perspective view shown in FIG. **15**B shows the first and second surfaces **1510** and **1540**, occluding the third and fourth surfaces **1520** and **1530**.

**[0066]** FIG. **16** is a front view of a sixth set of shapes **1600** that may be used to form an enhanced building block, according to an embodiment. In an embodiment, a circular shape is separated using a plurality of arcs to form multiple examples of two shapes. The arcs may form four mutually congruent, three-pointed shapes, such as **1610**-**1640**. A center portion may be transected into an additional four mutually congruent shapes, such as **1620**A-**1620**D. One or more of these two-dimensional shapes may be combined with other two-dimensional shapes to form one or more three-dimensional enhanced devices. For example, four shapes **1610**-**1640** may be combined with four shapes congruent to shape **430** in FIG. **4** to form a three-dimensional enhanced device similar to the fourth example enhanced building block **900** shown in FIG. **9**.

**[0067]** FIG. **17** is a front view of a seventh set of shapes **1700** that may be used to form an enhanced building block, according to an embodiment. In an embodiment, a circular shape is separated using a plurality of arcs to form multiple examples of two shapes. The arcs may form three mutually congruent, three-pointed shapes, such as **1710**-**1730**. Two of the arcs may form three mutually congruent, two-pointed ellipsoid shapes, such as **1740**-**1760**. One or more of these two-dimensional shapes may be combined with other two-dimensional shapes to form one or more three-dimensional enhanced devices, such as using six of the three-pointed shapes **1710** as shown in FIGS. **18**A-**18**B.

**[0068]** FIGS. **18**A-**18**B are views of an eighth example enhanced building block **1800**, according to an embodiment. In an embodiment, an eighth example enhanced building block **1800** may be formed using six of the three-pointed shapes **1710** shown in FIG. **17** coupled along the entire length of their edges. FIG. **18**A is a top view of an eighth example enhanced building block **1800**, whereas FIG. **18**B is a perspective view of the eighth example enhanced building block **1800**, according to an embodiment. Block **1800** is formed

from six of the three-pointed shapes **1710**, where the six shapes are grouped into coplanar pairs: **1810** is coplanar with **1840**, **1820** is coplanar with **1850**, and **1830** is coplanar with **1860**. Because of the length of outer arcs **1810**C, **1820**C and **1830**C, combining the coplanar pairs **1810-1830** includes deflecting outer corners upward or downward, as shown in FIG. **18**B. Also as shown in FIG. **18**B, the central point is formed by separating the central point of each coplanar pair into an upper vertex and lower vertex. In other embodiments, the eighth example enhanced building block **1800** may be formed using only three non-coplanar shapes **1710**, where the central point is formed either into an upper vertex or into a lower vertex.

**[0069]** FIGS. **19**A-**19**B are perspective views of a ninth example enhanced building block **1900**, according to an embodiment. Using four of the shapes **440** shown in FIG. **4** coupled along the entire length of their edges, a ninth example enhanced building block **1900** may be formed. The perspective view shown in FIG. **19**A presents the first two surfaces **1910** and **1930** to the viewer, where surfaces **1920** and **1940** are occluded by the other two surfaces. The perspective view shown in FIG. **19**B also presents the first two surfaces **1910** and **1930** to the viewer, where surfaces **1920** and **1940** are again occluded by the other two surfaces.

**[0070]** FIGS. **20**A-**20**B are perspective views of a tenth example enhanced building block **2000**, according to an embodiment. Using four of the shapes **420** shown in FIG. **4** coupled along the entire length of their edges, a tenth example enhanced building block **2000** may be formed. The perspective view shown in FIG. **20**A presents the first two surfaces **2010** and **2030** to the viewer, where surfaces **2020** and **2040** are occluded by the other two surfaces. The perspective view shown in FIG. **20**B presents surfaces **2010**, **2030**, and **2040** to the viewer, where surface **2020** is again occluded by the other two surfaces.

**[0071]** FIGS. **21**A-**21**B are perspective views of an eleventh example enhanced building block **2100**, according to an embodiment. Using three of the shapes **720**A-**720**C shown in FIG. **7** coupled along the entire length of their edges, an eleventh example enhanced building block **2100** may be formed. The perspective view shown in FIG. **21**A presents the first two surfaces **2110** and **2120** to the viewer, where the remaining surface **2130** is occluded by the first two surfaces. The perspective view shown in FIG. **21**B presents surfaces **2120** and **2130** to the viewer, where the remaining surface **2110** is occluded.

**[0072]** FIGS. **22**A-**22**B are views of a twelfth example enhanced building block **2200**, according to an embodiment. Using three of the shapes **140** shown in FIG. **1** coupled along the entire length of their edges, a twelfth example enhanced building block **2200** may be formed. An additional shape may be cut from two of the **140** shapes, where the cut shape is similar to elliptical shape **110** shown in FIG. **1**. The side perspective view shown in FIG. **22**A presents the first cut surface **2210** and the elliptical shape **2230**, where the remaining cut surface **2220** and uncut shape **2240** is occluded by the first two surfaces. The top view shown in FIG. **22**B presents the first two cut surfaces **2210** and **2220** joined by the cut shape **2230**, where the remaining uncut surface **2240** is occluded.

**[0073]** FIGS. **23**A-**23**B are perspective views of a thirteenth example enhanced building block **2300**, according to an embodiment. FIG. **23** is a perspective view of a thirteenth example enhanced building block **2300**, according to an embodiment. Using four of the shapes **450** shown in FIG. **4** coupled along the entire length of their edges, a thirteenth example enhanced building block **2300** may be formed. The top perspective view shown in FIG. **23**A presents the first three surfaces **2310-2330**, where the remaining surface **2340** is occluded by the first three surfaces. The side perspective view shown in FIG. **23**B presents two surfaces **2320** and **2330**, where the remaining surfaces **2310** and **2340** are occluded.

**[0074]** FIGS. **24**A-**24**B are perspective views of a fourteenth example enhanced building block **2400**, according to an embodiment. This building block **2400** may include a first group of six shapes **2411-2416**. For example, building block **2400** may include a first group of six of the seventh example enhanced building blocks **1500** shown in FIG. **15**, where the six three-dimensional building blocks **2411-2416** may be combined on a common vertex to form a star-shaped configuration. Each of the six building blocks **2411-2416** may be connected to respective two-dimensional elliptical shapes **2421-2426**, such as two-dimensional shapes **110** shown in FIG. **1**. The six two-dimensional elliptical shapes **2421-2426** may be combined on a common vertex to form a two-dimensional six-pointed star-shaped configuration. A second group of six three-dimensional blocks **2431-2436** may be combined in a second three-dimensional star-shaped configuration, where the second star-shaped configuration is connected to the two-dimensional star-shaped configuration opposite from the first three-dimensional star-shaped configuration. Additional elliptical shapes **110** may be connected to form further examples related to the fourteenth example enhanced building block **2400**.

**[0075]** FIGS. **25**A-**25**B are perspective views of a fifteenth example enhanced building block **2500**, according to an embodiment. Using three, two-edged shapes **2510-2530** coupled along the entire length of their edges, a fifteenth example enhanced building block **2500** may be formed. The shapes **2510-2530** may be similar to shapes **720** shown in FIG. **7**, though inner edge **720**B may be less curved, resulting in a smaller area between inner edge **720**B and outer edge **720**A. The top perspective view shown in FIG. **25** presents the first two surfaces **2510** and **2520** to the viewer, where the remaining surface **2530** is occluded by the first two surfaces. The side perspective view shown in FIG. **25**B presents surface **2520**, where the remaining surfaces **2510** and **2530** are occluded.

**[0076]** FIGS. **26**A-**26**B are perspective views of a sixteenth example enhanced building block **2600**, according to an embodiment. Using four of the shapes **430** shown in FIG. **4** coupled along the entire length of their edges, a sixteenth example enhanced building block **2600** may be formed. The perspective view shown in FIG. **26**A presents surfaces **2610** and **2630**, where remaining surfaces **2620** and **2640** are occluded. The perspective view shown in FIG. **26**B presents surfaces **2610** and **2620**, where remaining surfaces **2630** and **2640** are occluded.

**[0077]** FIGS. **27**A-**27**B are perspective views of a seventeenth example enhanced building block **2700**, according to an embodiment. A seventeenth example enhanced building block **2700** may be formed using eight of the shapes **430** shown in FIG. **4** coupled along the entire length of their edges. For example, a first group of four shapes **2710-2740** may be configured to form a first square pyramid, a second group of four shapes **2750-2780** may be configured to form a second square pyramid, and the first square pyramid may be con-

nected to the second square pyramid. The perspective view shown in FIG. **27**A presents three shapes **2710**, **2720**, and **2730** on the top pyramid and shape **2750** and **2780** on the bottom pyramid, occluding the shape **2740** on the top pyramid and shapes **2760** and **2770** on the bottom pyramid. The perspective view shown in FIG. **27**B also presents three shapes **2710**, **2720**, and **2730** on the top pyramid and shape **2780** on the bottom pyramid, occluding the shape **2740** on the top pyramid and shapes **2750**, **2760**, and **2770** on the bottom pyramid.

## EXAMPLES

**[0078]** Example 1 includes a building block comprising a first substrate, a piezoelectric element disposed on the first substrate that generates an electric charge in response to vibration, and a light emitting diode disposed on the first substrate and electrically connected to the piezoelectric element, wherein the light emitting diode is configured to provide electroluminescence in response to the electric charge generated by piezoelectric element.

**[0079]** Example 1 includes a curvilinear tetrahedral enhanced building block comprising a first and second planar surfaces, the first and second planar surfaces each having three points and three edges, each edge having a sigmoid curve, the first and second planar surface having substantially the same shape and being coupled on the entire length of a first common edge to form a first warped surface group, a third and fourth planar surfaces, the third and fourth planar surfaces each having three points and three edges, each edge having an inverse sigmoid curve, the third and fourth planar surface having substantially the same shape and being coupled on the entire length of a second common edge to form a second warped surface group, wherein the first warped surface group is coupled to the second warped surface group such that the planar surfaces are warped and coupled by edges to form a curvilinear tetrahedral enhanced building block.

**[0080]** Example 2 includes the curvilinear tetrahedral enhanced building block of example 1, wherein the curvilinear tetrahedral enhanced building block includes a first, second, third, and fourth curved corner, each curved corner is configured to rotate respectively around a first, second, third, and fourth axis, and the first, second, third, and fourth axes are substantially mutually orthogonal.

**[0081]** Example 3 includes the curvilinear tetrahedral enhanced building block of any of examples 1-2, wherein a curvature of the first curved corner is arranged to exert a first force against a viscous medium while rotating in a first direction around the first axis and to exert a second force against the viscous medium while rotating in a second direction around the first axis, the first force greater than the second force, and rotating the first curved corner in a first direction causes a motion in a first direction of the curvilinear tetrahedral enhanced building block within the viscous medium.

**[0082]** Example 4 includes the curvilinear tetrahedral enhanced building block of example 1, further including a conductive element.

**[0083]** Example 5 includes the curvilinear tetrahedral enhanced building block of any of examples 1-4, wherein the conductive element is disposed on an outer surface of the curvilinear tetrahedral enhanced building block.

**[0084]** Example 6 includes the curvilinear tetrahedral enhanced building block of any of examples 1-4, wherein the conductive element is configured to generate an electrostatic field.

**[0085]** Example 7 includes the curvilinear tetrahedral enhanced building block of any of examples 1-6, wherein the electrostatic field is configured to induce motion in a dielectric fluid surrounding the curvilinear tetrahedral enhanced building block.

**[0086]** Example 8 includes the curvilinear tetrahedral enhanced building block of any of examples 1-4, further including a magnetic element configured to generate a magnetic field.

**[0087]** Example 9 includes the curvilinear tetrahedral enhanced building block of any of examples 1-8, wherein the magnetic element is disposed within the curvilinear tetrahedral enhanced building block.

**[0088]** Example 10 includes the curvilinear tetrahedral enhanced building block of any of examples 1-9, wherein the conductive element is configured to conduct electricity to the dielectric fluid surrounding the curvilinear tetrahedral enhanced building block, the magnetic element is configured to generate a magnetic field within the dielectric fluid, the generation of the magnetic field inducing magnetohydrodynamic motion within the dielectric fluid.

**[0089]** Example 11 includes the curvilinear tetrahedral enhanced building block of example 1, further including a power source configured to supply power to the conductive element.

**[0090]** Example 12 includes the curvilinear tetrahedral enhanced building block of any of examples 1-4, further including a piezoelectric element coupled to the conductive element.

**[0091]** Example 13 includes the curvilinear tetrahedral enhanced building block of example 12, wherein the piezoelectric element is configured to convert a received mechanical vibration into a piezoelectric charge.

**[0092]** Example 14 includes the curvilinear tetrahedral enhanced building block of example 12, wherein the piezoelectric element is configured to convert a received electrical charge into a piezoelectromechanical vibration.

**[0093]** Example 15 includes the curvilinear tetrahedral enhanced building block of example 1, wherein the first planar surface is configured to deform in a first planar deformation direction to generate lift across the first planar surface.

**[0094]** Example 16 includes the curvilinear tetrahedral enhanced building block of example 15, wherein the first planar surface is configured to deform in a second planar deformation direction to generate drag across the first planar surface.

**[0095]** Example 17 includes the curvilinear tetrahedral enhanced building block of example 15, wherein the first, second, third, and fourth planar surfaces are configured to deform in a first tetrahedral deformation configuration to promote rotation of the curvilinear tetrahedral enhanced building block in a first tetrahedral direction.

**[0096]** Example 18 includes the curvilinear tetrahedral enhanced building block of example 1, further including a directional flange, the directional flange configured to promote rotation of the curvilinear tetrahedral enhanced building block in a second tetrahedral direction.

**[0097]** This invention is intended to cover all changes and modifications of the example embodiments described herein that do not constitute departures from the scope of the claims.

**1**. A curvilinear tetrahedral enhanced building block comprising:

a first and second planar surfaces, the first and second planar surfaces each having three points and three edges,

each edge having a sigmoid curve, the first and second planar surface having substantially the same shape and being coupled on the entire length of a first common edge to form a first warped surface group;

a third and fourth planar surfaces, the third and fourth planar surfaces each having three points and three edges, each edge having an inverse sigmoid curve, the third and fourth planar surface having substantially the same shape and being coupled on the entire length of a second common edge to form a second warped surface group;

wherein the first warped surface group is coupled to the second warped surface group such that the planar surfaces are warped and coupled by edges to form a curvilinear tetrahedral enhanced building block.

**2**. The curvilinear tetrahedral enhanced building block of claim **1**, wherein:

the curvilinear tetrahedral enhanced building block includes a first, second, third, and fourth curved corner;

each curved corner is configured to rotate respectively around a first, second, third, and fourth axis; and

the first, second, third, and fourth axes are substantially mutually orthogonal.

**3**. The curvilinear tetrahedral enhanced building block of claim **2**, wherein:

a curvature of the first curved corner is arranged to exert a first force against a viscous medium while rotating in a first direction around the first axis and to exert a second force against the viscous medium while rotating in a second direction around the first axis;

the first force greater than the second force; and

rotating the first curved corner in a first direction causes a motion in a first direction of the curvilinear tetrahedral enhanced building block within the viscous medium.

**4**. The curvilinear tetrahedral enhanced building block of claim **1**, further including a conductive element.

**5**. The curvilinear tetrahedral enhanced building block of claim **4**, wherein the conductive element is disposed on an outer surface of the curvilinear tetrahedral enhanced building block.

**6**. The curvilinear tetrahedral enhanced building block of claim **4**, wherein the conductive element is configured to generate an electrostatic field.

**7**. The curvilinear tetrahedral enhanced building block of claim **6**, wherein the electrostatic field is configured to induce motion in a dielectric fluid surrounding the curvilinear tetrahedral enhanced building block.

**8**. The curvilinear tetrahedral enhanced building block of claim **4**, further including a magnetic element configured to generate a magnetic field.

**9**. The curvilinear tetrahedral enhanced building block of claim **8**, wherein the magnetic element is disposed within the curvilinear tetrahedral enhanced building block.

**10**. The curvilinear tetrahedral enhanced building block of claim **9**, wherein:

the conductive element is configured to conduct electricity to the dielectric fluid surrounding the curvilinear tetrahedral enhanced building block;

the magnetic element is configured to generate a magnetic field within the dielectric fluid, the generation of the magnetic field inducing magnetohydrodynamic motion within the dielectric fluid.

**11**. The curvilinear tetrahedral enhanced building block of claim **1**, further including a power source configured to supply power to the conductive element.

**12**. The curvilinear tetrahedral enhanced building block of claim **4**, further including a piezoelectric element coupled to the conductive element.

**13**. The curvilinear tetrahedral enhanced building block of claim **12**, wherein the piezoelectric element is configured to convert a received mechanical vibration into a piezoelectric charge.

**14**. The curvilinear tetrahedral enhanced building block of claim **12**, wherein the piezoelectric element is configured to convert a received electrical charge into a piezoelectromechanical vibration.

**15**. The curvilinear tetrahedral enhanced building block of claim **1**, wherein the first planar surface is configured to deform in a first planar deformation direction to generate lift across the first planar surface.

**16**. The curvilinear tetrahedral enhanced building block of claim **15**, wherein the first planar surface is configured to deform in a second planar deformation direction to generate drag across the first planar surface.

**17**. The curvilinear tetrahedral enhanced building block of claim **15**, wherein the first, second, third, and fourth planar surfaces are configured to deform in a first tetrahedral deformation configuration to promote rotation of the curvilinear tetrahedral enhanced building block in a first tetrahedral direction.

**18**. The curvilinear tetrahedral enhanced building block of claim **1**, further including a directional flange, the directional flange configured to promote rotation of the curvilinear tetrahedral enhanced building block in a second tetrahedral direction.

* * * * *